
**PRODUCT DATA SHEET**
**C10762**

**4-Port Dual Directional Coupler** employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

**Features:**

High Power      Wide Bandwidths      Small Size      Flat Coupling      Custom Designs Available

**Electrical Specifications:**

Frequency: 1000 - 6000 MHz  
Power: 300 W CW  
Coupling: 40 ± 1.0 dB Max.  
Insertion Loss: 0.2 dB Max.  
Flatness: ± 0.5 dB Max.  
VSWR (ML): 1.30:1 Max. (1.35:1 Max. with 7/16 ML connectors)  
Directivity: 15 dB Min.


**Mechanical Specifications:**

Type: Connectorized  
Material: Aluminum 6061-T6  
Surface Finish: Chem. Film Per MIL-DTL-5541F  
Type II Class 3 (Clear Iridite)  
RoHS Compliant Available  
Operating Temperature: -55°C to +75°C  
Storage Temperature: -60°C to +85°C  
Humidity: 95% Non-Condensing  
Size: 2.0 x 2.0 x 1.06"

**Connector Configurations:**

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C10762-10	N Female	N Female	N Female	N Female
C10762-12	N Female	N Female	SMA	SMA
C10762-14	N Male	N Male	N Female	N Female
C10762-20*	7/16 Female	7/16 Female	7/16 Female	7/16 Female
C10762-22*	7/16 Female	7/16 Female	SMA	SMA
C10762-612	N Female	N Male	SMA	SMA
C10762-714	N Male	N Female	N Female	N Female
C10762-727*	7/16 Male	7/16 Female	N Female	N Female

\*Starred options are 3.0 x 3.0 x 1.36"

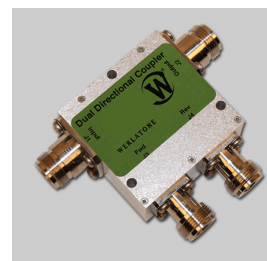


## PRODUCT DATA SHEET


C10762

### Performance Data (Specifications subject to change without notice):


Coupling:

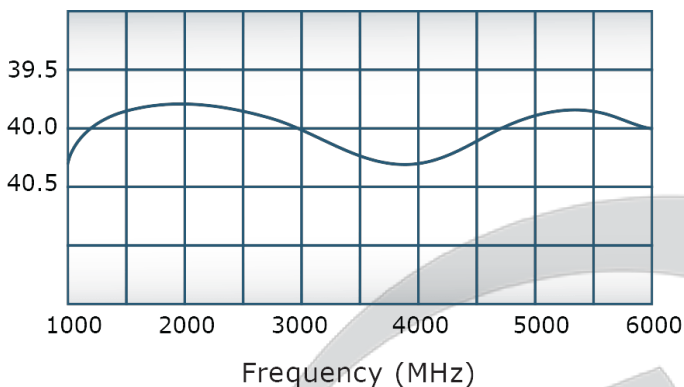


VSWR:

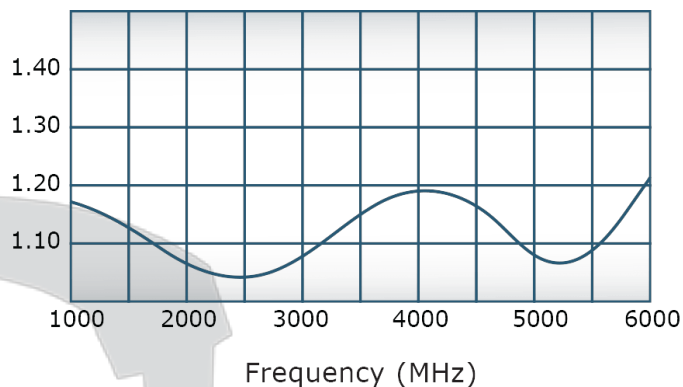




Insertion Loss:

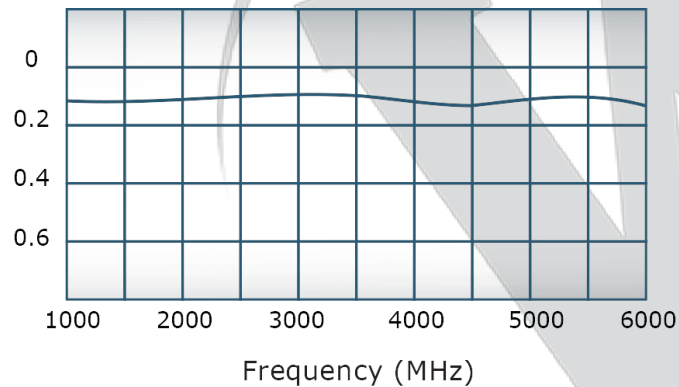

Directivity:

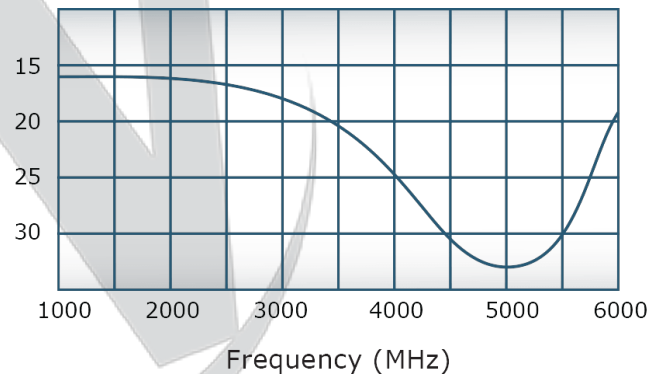

**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
This document contains proprietary information which is the sole property of Werlatone, Inc.

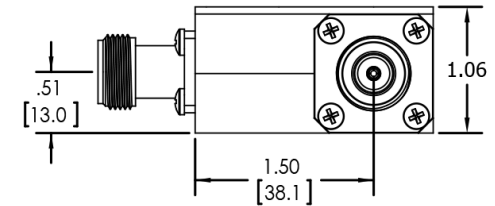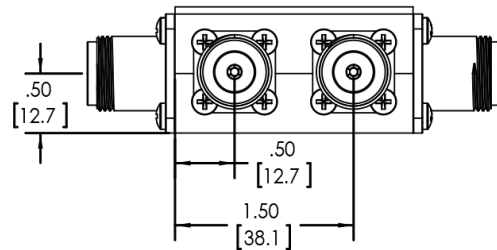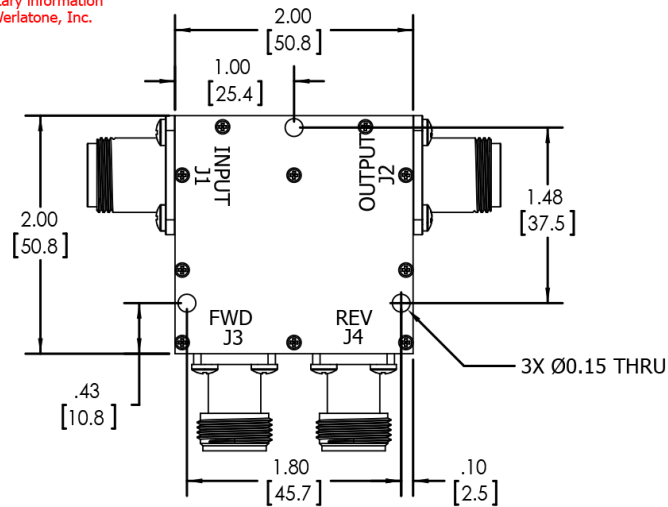

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
	PRE-RELEASE		

UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100 DIMENSIONS ARE IN INCHES (mm) DIMENSIONS ARE IN INCHES (mm) DIMENSIONAL LIMITS APPLY BEFORE FINISHES TOLERANCES: ANGLES ± 2° 3 PL ± .005 (13) 2 PL ± .015 (4) REMOVE ALL BURRS AND SHARP EDGES R.01 MAX CONCENTRICITY MACHINED DIA. .002 FIM MACHINE TOOL MATCH .003 MAX		OWN	DATE	<b>WERLATONE SINCE 1965</b> 17 Jon Barrett Rd Patterson, NY 12563
		SC	9/30/2014	
		CHK	DATE	
		CS	9/30/2014	
TITLE <b>OUTLINE</b> SIZE CAGE CODE DWG NO B 28812 21250-500		ENGR	DATE	REV
		BW	9/30/2014	
		DATE		
		DATE		
APPLICATION		DATE		SCALE
NEXT ASSY USED ON		DATE		
THIRD ANGLE PROJECTION		DATE		SHEET 1 OF 1
		DATE		

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.  
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com