


PRODUCT DATA SHEET
C4025

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 20 - 100 MHz
Power: 250 W CW
Coupling: 30 ± 1.0 dB Max.
Flatness: ± 0.5 dB Max.
Insertion Loss: 0.25 dB Max.
VSWR (ML): 1.25:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 4.0 x 2.0 x 1.88"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C4025-10	N Female	N Female	N Female	N Female
C4025-12	N Female	N Female	SMA	SMA
C4025-13	N Female	N Female	BNC	BNC
C4025-102	SMA	SMA	SMA	SMA

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C4025




PRODUCT DATA SHEET


C4025

Performance Data (Specifications subject to change without notice):


Coupling:

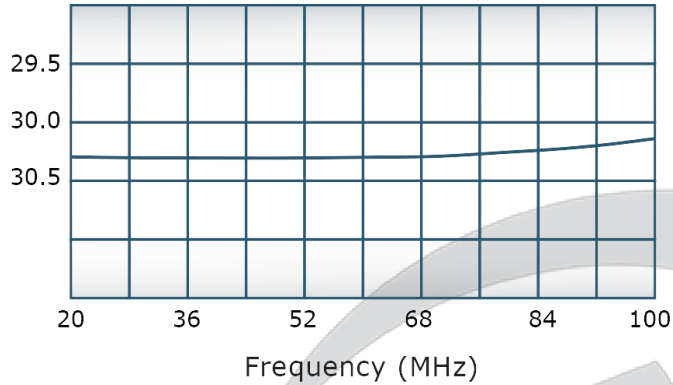


VSWR:

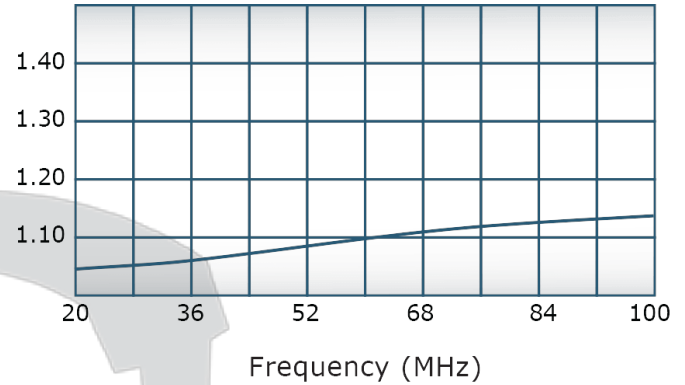

Insertion Loss:

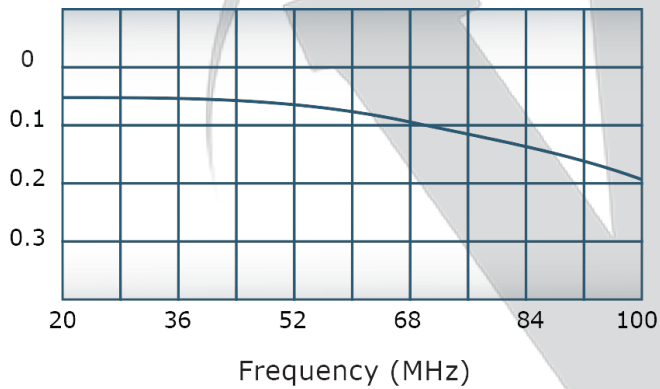

Directivity:

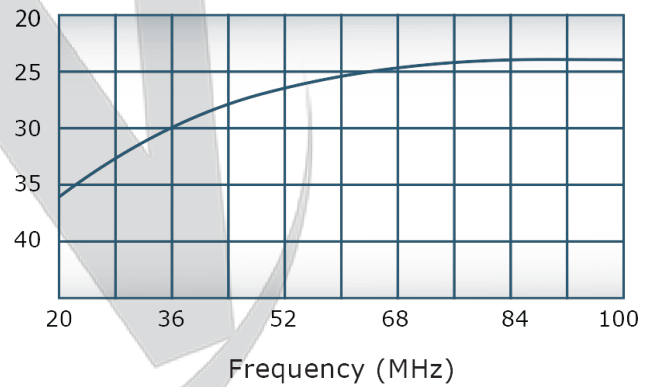


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 1001	10/86	GW
B	ECN 1002	6/92	DK
C	ECN 1319	4/95	CS
D	ECN 1421	12/96	CS
E	ECN 9696	11/18	RB

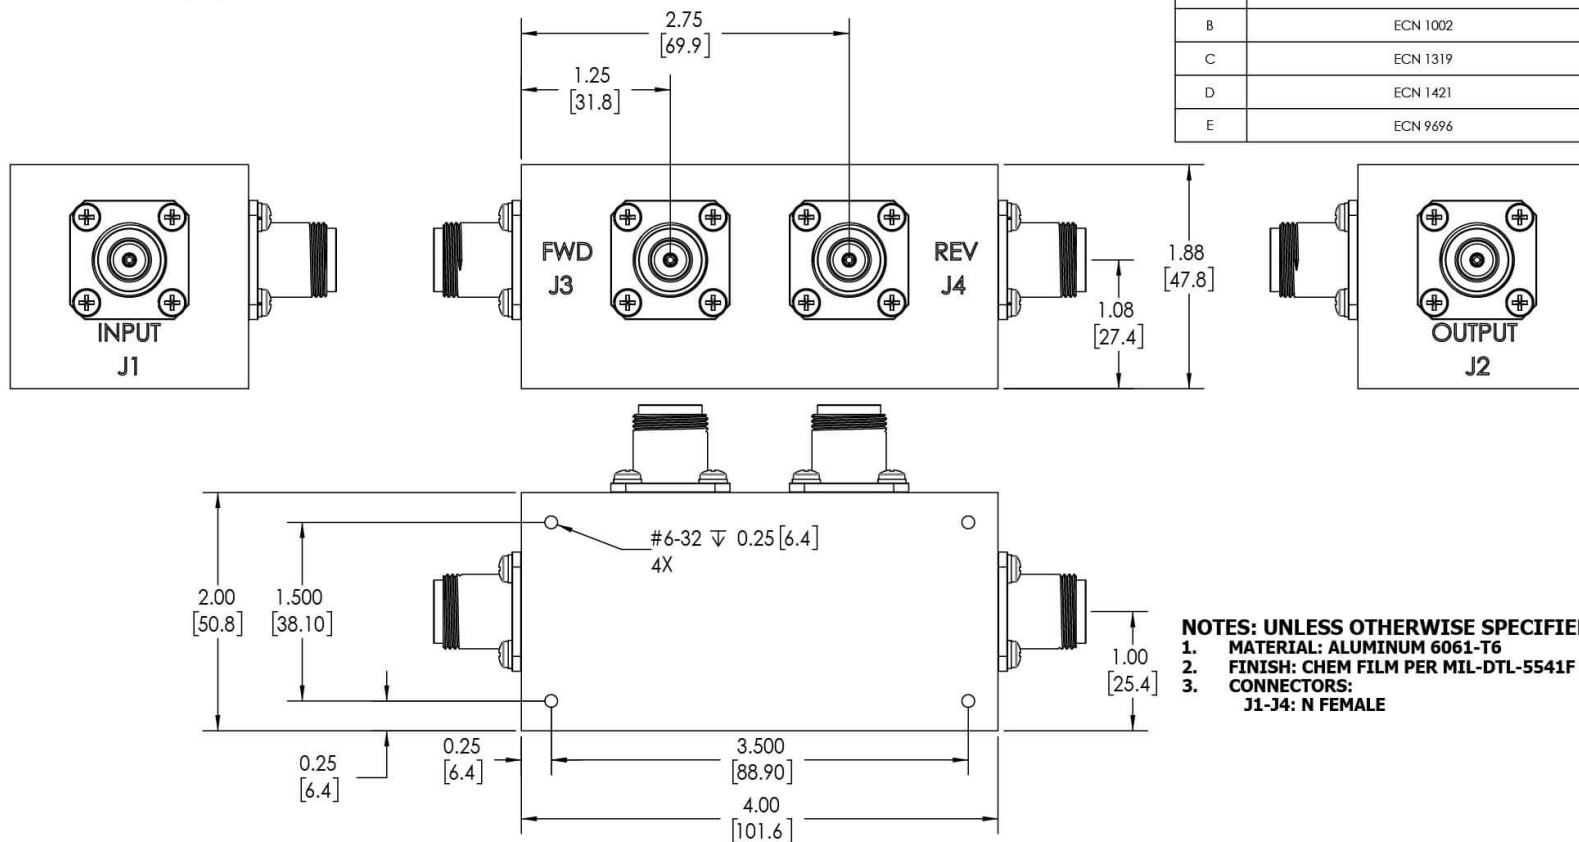

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)
3. CONNECTORS:
J1-J4: N FEMALE

		UNLESS OTHERWISE SPECIFIED		DWN DATE		 WELRATON[®] SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563	
		INTERNET DRAWING 14K WIT-KILO-10K		SD 2/11/2019					
		DIMENSIONING PER ASME Y14.5-2009		CHR DATE					
		PARALLELITY, SURF FOR BEST ONLY		CS 2/11/2019					
		DIMENSIONS ARE IN INCHES		ENGR DATE		OUTLINE SIZE: CAGE CODE DWSO NO 10018-500		REV E	
		DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		ENGR DATE					
		TOLERANCES:		RFRGR DATE					
		ANGLES = 2° 3 PL. ± .005 [13] 2 PL. ± .015 [38]		QA DATE					
		REMOVE ALL BURRS AND SHARP EDGES R0.1 MAX		RLSE DATE					
		CONCENTRICITY MACHINED DIA. AND FIN							
		MACHINE TSK, MACHINRY, AND MAX							
NEXT ASSY USED ON									
APPLICATION		THIRD ANGLE PROJECTION				SCALE 1:1		SHEET 1 OF 1	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com