
PRODUCT DATA SHEET
C5846

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 470 - 860 MHz
Power: 800 W CW
Coupling: 50 ± 1.0 dB Max.
Flatness: ± 0.3 dB Max.
Insertion Loss: 0.1 dB Max.
VSWR (ML): 1.20:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 3.0 x 3.0 x 1.09"

Connector Configurations:


Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C5846-10	N Female	N Female	N Female	N Female
C5846-12	N Female	N Female	SMA	SMA
C5846-13	N Female	N Female	BNC	BNC
C5846-20*	7/16 Female	7/16 Female	N Female	N Female
C5846-22*	7/16 Female	7/16 Female	SMA	SMA
C5846-23*	7/16 Female	7/16 Female	BNC	BNC
C5846-302	TNC Female	TNC Female	SMA	SMA
C5846-727*	7/16 Male	7/16 Female	N Female	N Female

*Starred options are 3.0 x 3.0 x 1.59"



WERLATONE

Model C5846

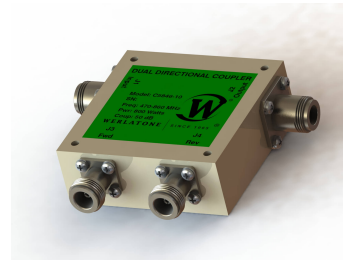


PRODUCT DATA SHEET


C5846

Performance Data (Specifications subject to change without notice):


Coupling:

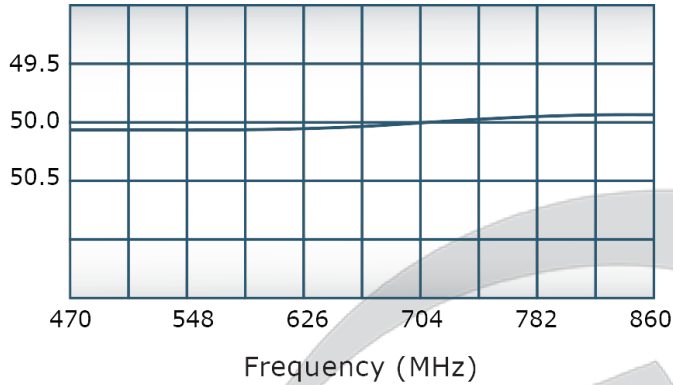


VSWR:

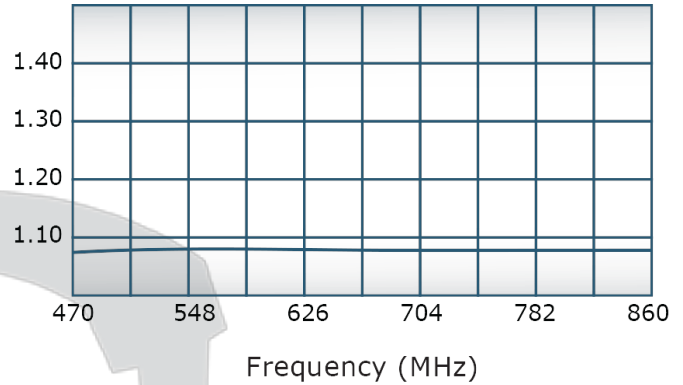

Insertion Loss:

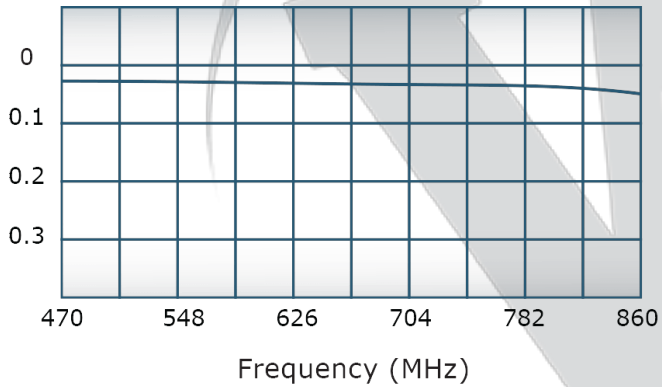

Directivity:

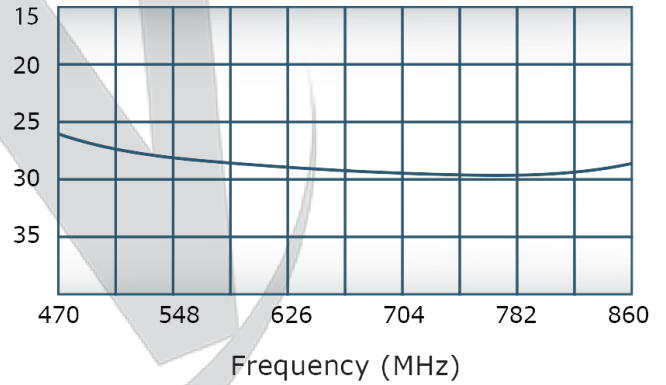

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.



REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE® SINCE 1965	17 Jon Barrett Rd Patterson, NY 12568		
		• INTERPRET DRAWING AS PER: STD-100 • DIMENSIONING PER ASME Y14.5-2009 • ARCHITECTURAL INFO FOR KEY ONLY • DIMENSIONS ARE IN INCHES • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES • TOLERANCES: ANGLES ± 2° 2 P. ± .002 [13] 3 P. ± .005 [38] • REMOVE ALL BURS AND SHARP EDGES R.21 MAX • CONCENTRICITY MACHINED DIA. ±.002 FIM • MACHINE TOOL REGISTRATION .002 MAX		RH	7/5/2001		 WERLATONE® SINCE 1965		
				CHK	DATE				
				ENGR	DATE				
				RFGR	7/5/2001				
				QA	DATE	OUTLINE			
						SIZE	CAGE CODE	DWG NO	
						10379-505			
				RLSE	DATE	SCALE 1:1		SHEET 1 OF 1	
NEXT ASSY USED ON		THIRD ANGLE PROJECTION 							
APPLICATION									

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com