


PRODUCT DATA SHEET
C6418

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 13 - 175 MHz
Power: 10,000 W CW (13-60 MHz), 3,000 W CW (60-150 MHz),
2,500 W CW (150-175 MHz)
Coupling: 50 ± 1.0 dB Max.
Insertion Loss: 0.1 dB Max.
Flatness: ± 0.2 dB Max. (13-80 MHz), ±0.5 dB Max. (80-175 MHz)
VSWR (ML): 1.20:1 Max.
Directivity: 25 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 6.0 x 3.0 x 2.24"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C6418-20	7/16 Female	7/16 Female	N Female	N Female
C6418-22	7/16 Female	7/16 Female	SMA	SMA
C6418-23	7/16 Female	7/16 Female	BNC	BNC
C6418-30	LC Female	LC Female	N Female	N Female
C6418-33	LC Female	LC Female	BNC	BNC
C6418-501	SQS Female	SQS Female	N Female	N Female
C6418-7502	SQS Male	SQS Female	SMA	SMA
C6418-7503	SQS Male	SQS Female	BNC	BNC
C6418-7508	SQS M-P	SQS Female	BNC	BNC
C6418-QC-0	QC Block	QC Block	N Female	N Female

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



WERLATONE

Model C6418




PRODUCT DATA SHEET


C6418

Performance Data (Specifications subject to change without notice):


Coupling:

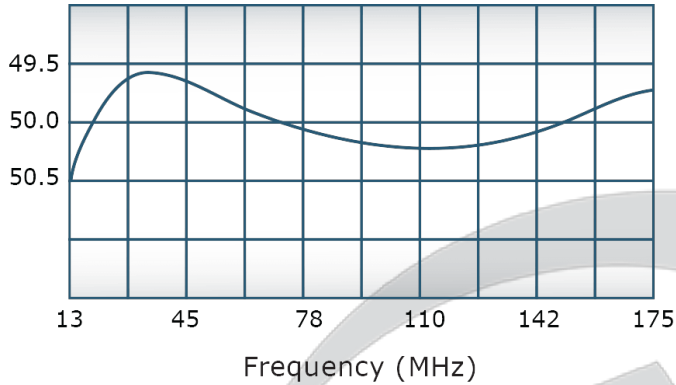


VSWR:

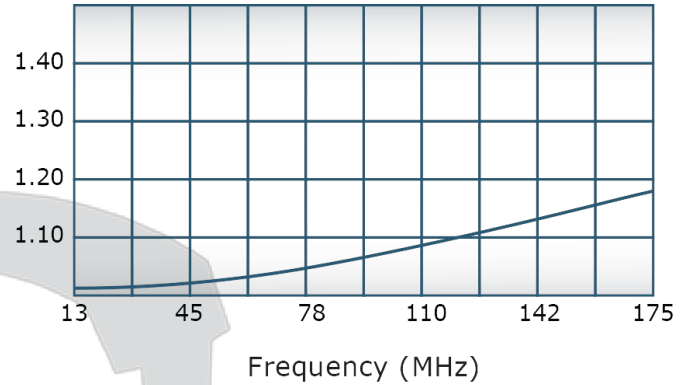

Insertion Loss:

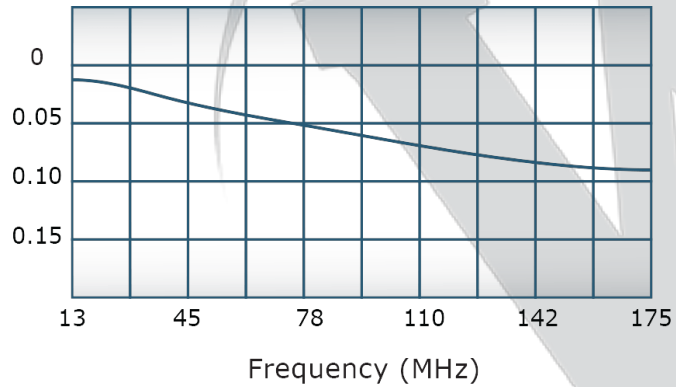

Directivity:

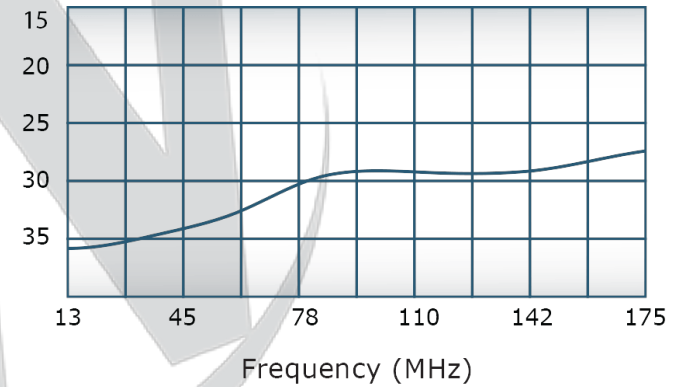


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	10/29/2018	CS

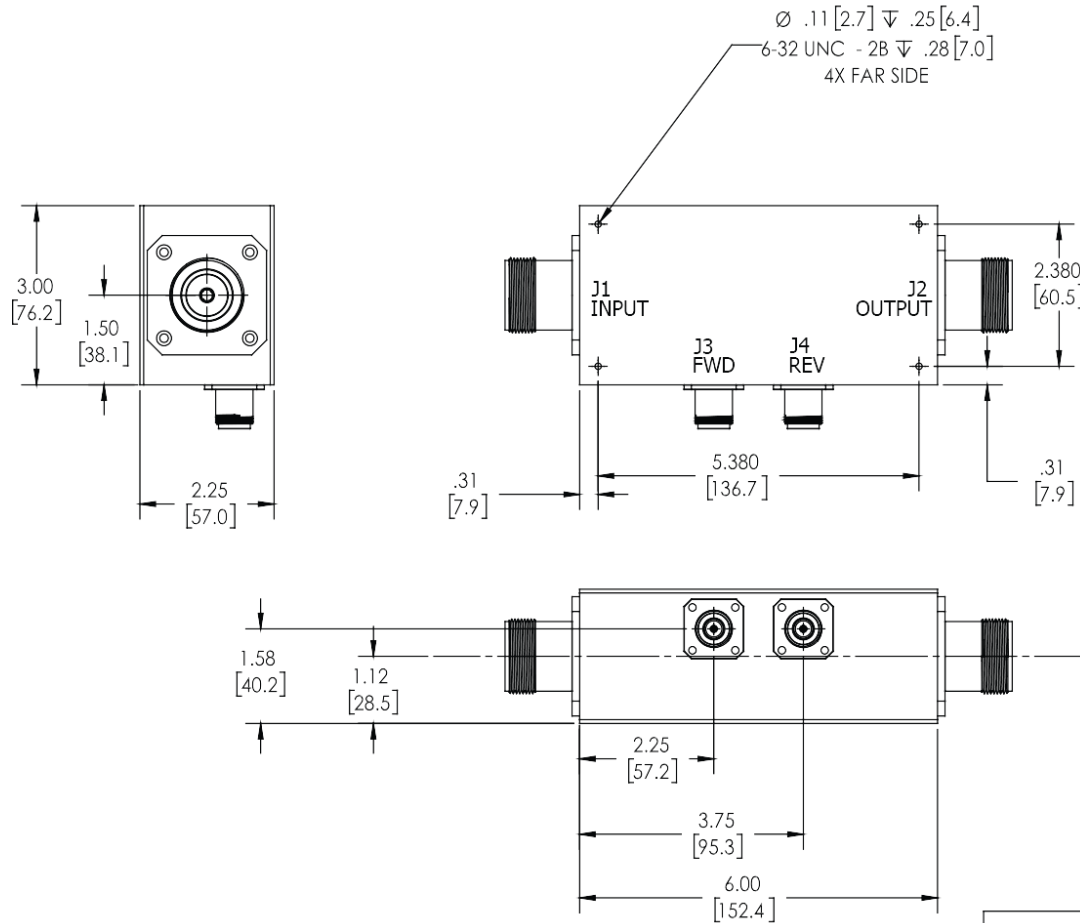

UNLESS OTHERWISE SPECIFIED		OWN	DATE	17 Jon Barrett Rd Patterson, NY 12563	
• INTERPRET DRAWING JAW MIL-STD-100	PLP	DATE	10/25/2018	WERLATONE SINCE 1965	
• DIMENSIONING PER ASME Y14.5M-2009	CHK	DATE	10/25/2018		
• PRELIMINARY DIMS FOR REF ONLY	CS	DATE	10/29/2018	TITLE	
• DIMENSIONS ARE IN INCHES (mm)	ENGR	DATE			
• DIMENSIONAL UNITS APPLY BEFORE PROCESSES	INFR	DATE		SIZE CASE CODE DWG NO	
• TOLERANCES:	QA	DATE			
ANGLES: ± 2°	RLSE	DATE		SCALE	
2 PL ± .005 (1.3)					
2 PL ± .015 (4)				SHEET 1 OF 1	
• REMOVE ALL BURRS AND SHARP EDGES R.03 MAX					
• CONCENTRICITY MACHINED DIA: .002 FIM				APPLICATION	
• MACHINE TOOL REPAIR: .003 MAX					

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com