


PRODUCT DATA SHEET
C6461

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 400 - 1000 MHz
Power: 1500 W CW
Coupling: 50 ± 1.0 dB Max.
Flatness: ± 0.3 dB Max.
Insertion Loss: 0.1 dB Max.
VSWR (ML): 1.10:1 Max.
Directivity: 23 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 3.0 x 3.0 x 1.59"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C6461-10*	N Female	N Female	N Female	N Female
C6461-12*	N Female	N Female	SMA	SMA
C6461-20	7/16 Female	7/16 Female	N Female	N Female
C6461-22	7/16 Female	7/16 Female	SMA	SMA
C6461-23	7/16 Female	7/16 Female	BNC	BNC
C6461-41*	SC Female	SC Female	N Female	N Female
C6461-43*	SC Female	SC Female	SMA	SMA
C6461-627	7/16 Female	7/16 Female	N Female	N Female
C6461-727	7/16 Male	7/16 Female	N Female	N Female
C6461-728	7/16 Male	7/16 Female	SMA	SMA
C6461-12STS*	Stainless Steel N Female	Stainless Steel N Female	Stainless Steel SMA	Stainless Steel SMA

*Starred options are 3.0 x 3.0 x 1.09"

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



WERLATONE

Model C6461




PRODUCT DATA SHEET


C6461

Performance Data (Specifications subject to change without notice):


Coupling:

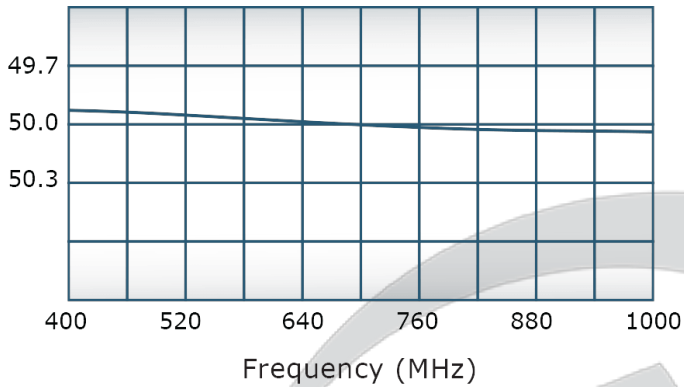


VSWR:

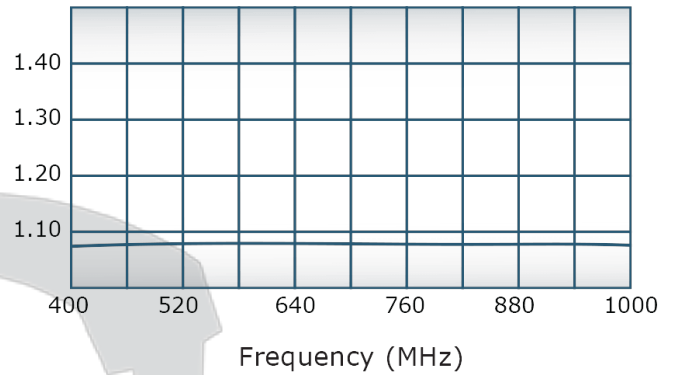

Insertion Loss:

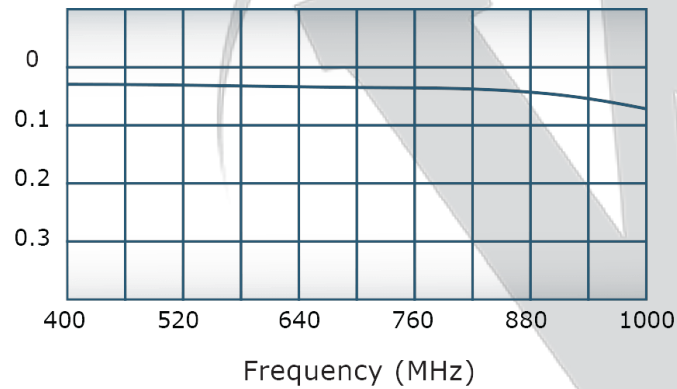


Directivity:

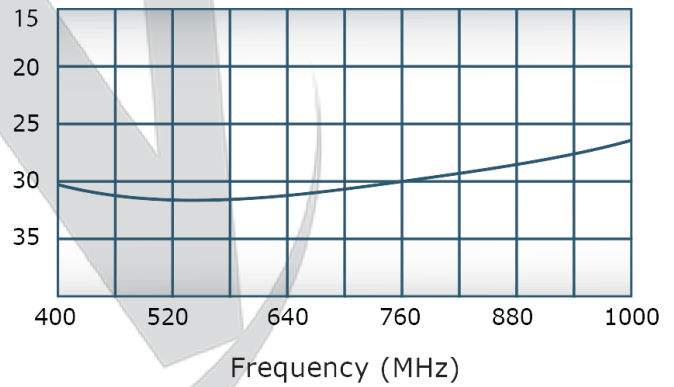

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

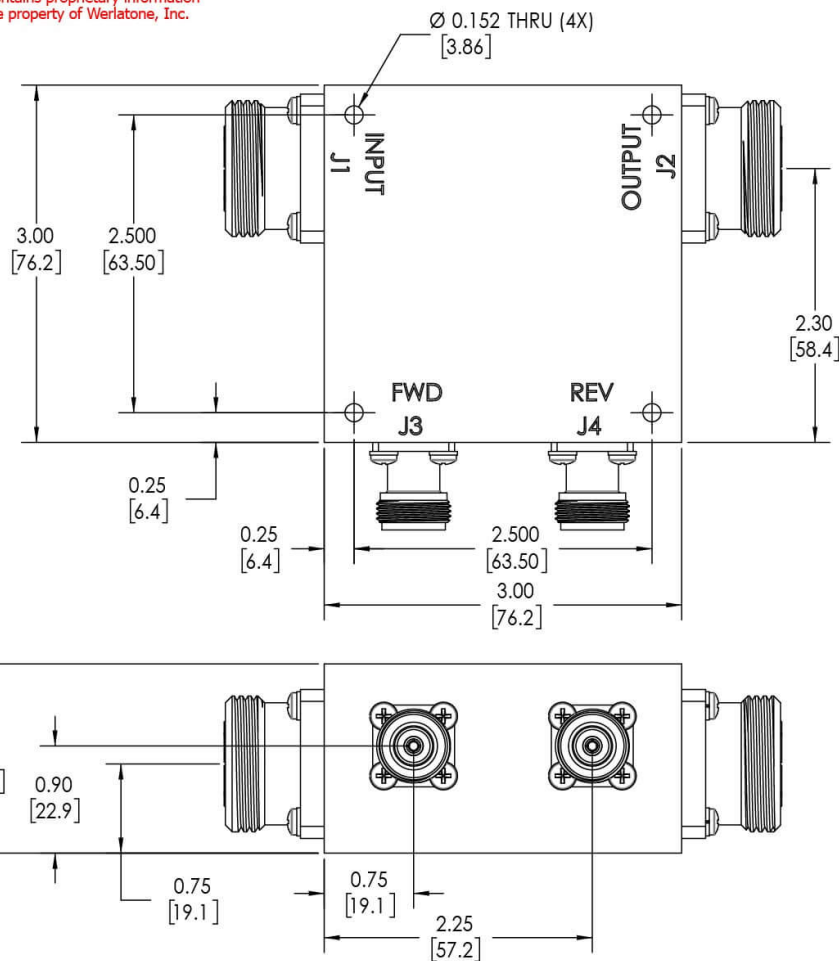


REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	5/13/2019	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F CLASS I TYPE 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1, J2: 7/16 FEMALE
J3, J4: N FEMALE

		UNLESS OTHERWISE SPECIFIED		OWN	DATE		WERLATONE [®] SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
		INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100 DIMENSIONS FOR ASME Y14.5M-2009 PARENTHESES FOR REF ONLY DIMENSIONS ARE IN INCHES DIMENSIONAL LIMITS APPLY BEFORE PROCESSES TOLERANCES: ANGLES ± 2° 3 PL ± .005 [13] 2 PL ± .015 [38] REMOVE ALL BURRS AND SHARP EDGES R.01 MAX CONCENTRICITY MACHINED DIA. .002 FIM MACHINE TOOL MISMATCH .003 MAX		SD	5/13/2019			
NEXT ASSY USED ON		APPLICATION		THIRD ANGLE PROJECTION		CHK	DATE	TITLE OUTLINE
				CS	5/13/2019	ENGR	DATE	
				REVISIONS		REFR	DATE	SIZE B
				QA	DATE	CAGE CODE 10443-501		
				REVISIONS		RLSE	DATE	DWG NO 10443-501
				SCALE 1:1				
						SHEET 1 OF 1		REV A

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com