



PRODUCT DATA SHEET

C6729

3-Port Uni-Directional Coupler: Consists of a main line and a coupled line. One end of the coupled line is internally terminated, while the other end serves as a coupled port. Ideal for sampling and monitoring power in one direction at a given time. It is necessary to physically reverse the orientation of the unit to change from a forward to a reverse power measurement.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 0.01 - 1000 MHz
 Power: 50 W CW
 Coupling: 30 ± 1.0 dB Max.
 Insertion Loss: 0.7 dB Max.
 Flatness: ± 0.5 dB Max.
 VSWR (ML): 1.30:1 Max.
 Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 5.2 x 2.27 x 1.69"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)
C6729-10	N Female	N Female	N Female
C6729-12	N Female	N Female	SMA
C6729-13	N Female	N Female	BNC
C6729-102	SMA	SMA	SMA

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C6729




PRODUCT DATA SHEET


C6729

Performance Data (Specifications subject to change without notice):


Coupling:

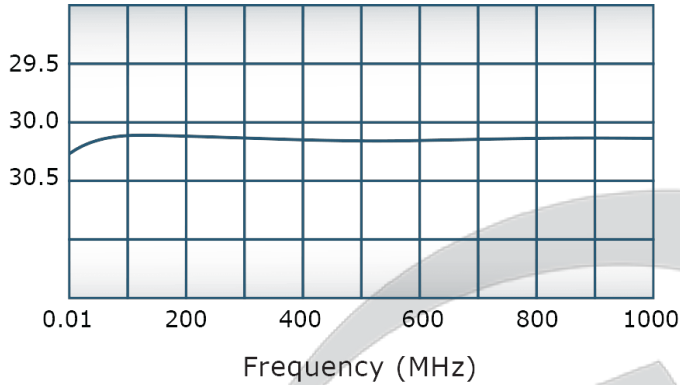


VSWR:

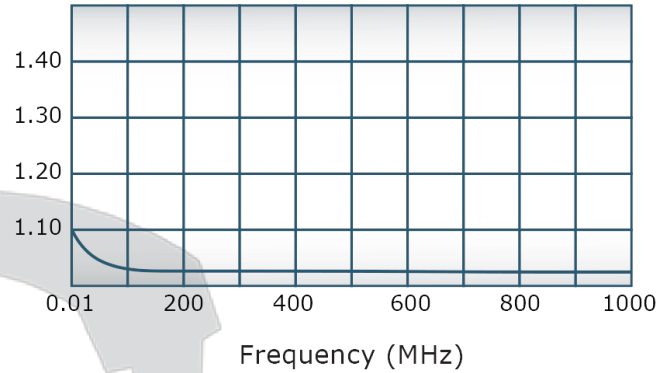

Insertion Loss:

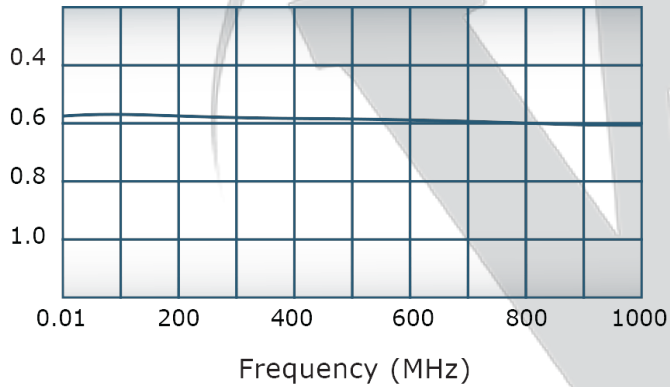

Directivity:

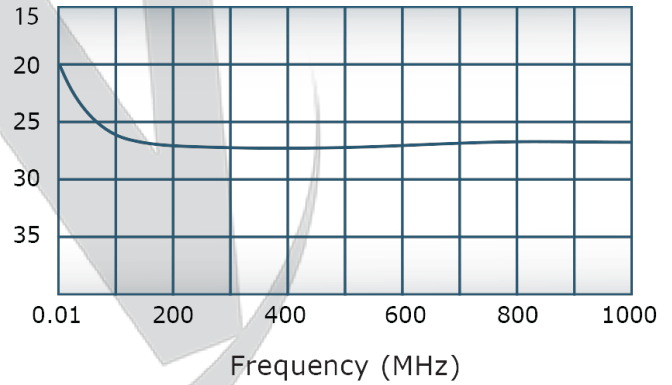

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION

This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 3933	1/06	CS
B	ECN 9696	11/30/2018	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1, J2: N FEMALE
J3: BNC FEMALE

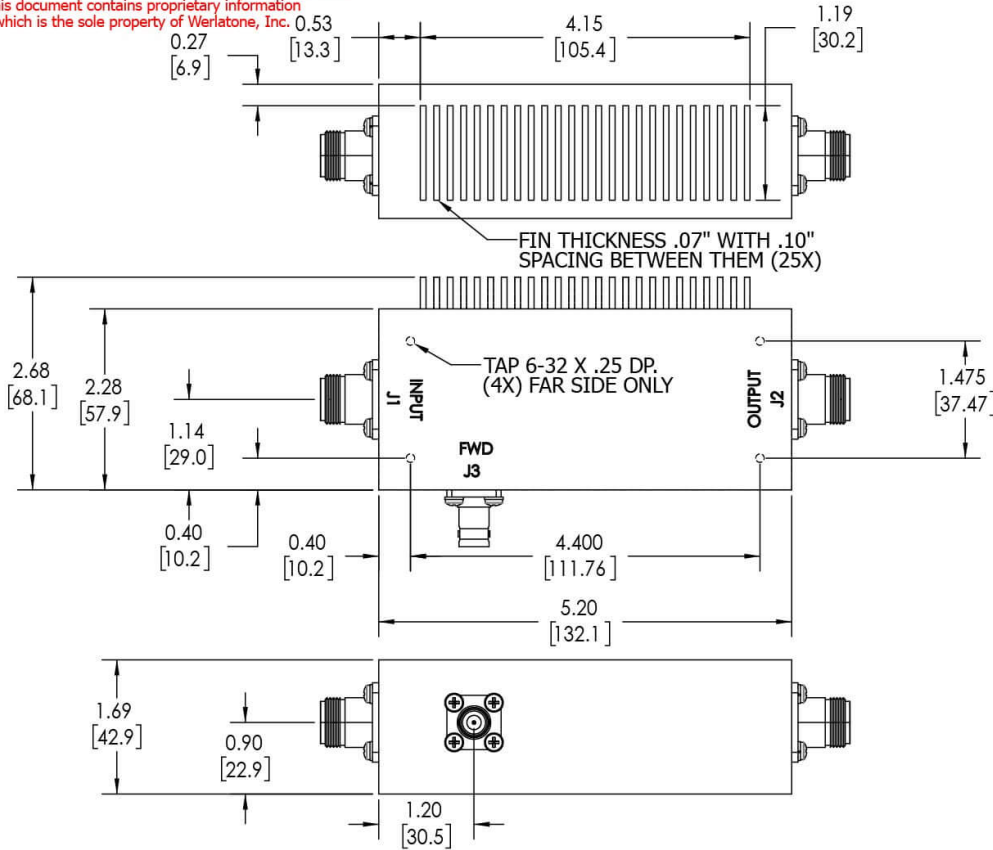

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965		17 Jon Barrett Rd	
		INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		SD	2/11/2019			Patterson, NY 12563	
		DIMENSIONS PER ASME Y14.5M-2009		CHK	DATE				
		DIMENSIONAL INFO FOR REF ONLY		CS	2/11/2019	TITLE			
		DIMENSIONS ARE IN INCHES		ENGR	DATE				
		DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		INFR	2/27/2002	OUTLINE			
		TOLERANCES:		QA	DATE	SIZE	CAGE CODE	DWG NO	REV
		ANGLES ± 2°		RLSE	DATE	B		10407-503	B
		3 PL ± .005 [13]							
		2 PL ± .015 [38]							
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX							
		CONCENTRICITY MACHINED DIA. .002 FIM							
		MACHINE TOOL MISMATCH .003 MAX							
NEXT ASSY		USED ON							
APPLICATION		THIRD ANGLE PROJECTION							
				SCALE: 1:1.5					
				SHEET 1 OF 1					

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com