

PRODUCT DATA SHEET

C6756

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 470 - 860 MHz
 Power: 1000 W CW
 Coupling: 40 ± 1.0 dB Max.
 Insertion Loss: 0.2 dB Max.
 Flatness: ± 0.3 dB Max.
 VSWR (ML): 1.20:1 Max.
 Directivity: 20 dB Min.


Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F
 Type I Class 3 (Yellow Iridite)
 RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 95% Non-Condensing
 Size: 3.0 x 3.0 x 1.09"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C6756-10	N Female	N Female	N Female	N Female
C6756-12	N Female	N Female	SMA	SMA
C6756-13	N Female	N Female	BNC	BNC
C6756-20*	7/16 Female	7/16 Female	N Female	N Female
C6756-22*	7/16 Female	7/16 Female	SMA	SMA
C6756-23*	7/16 Female	7/16 Female	BNC	BNC
C6756-302	TNC Female	TNC Female	SMA	SMA
C6756-627*	7/16 Female	7/16 Male	N Female	N Female
C6756-712	N Male	N Female	SMA	SMA
C6756-714	N Male	N Female	N Female	N Female
C6756-727*	7/16 Male	7/16 Female	N Female	N Female
C6756-728*	7/16 Male	7/16 Female	SMA	SMA

*Starred options are 3.0 x 3.0 x 1.59"

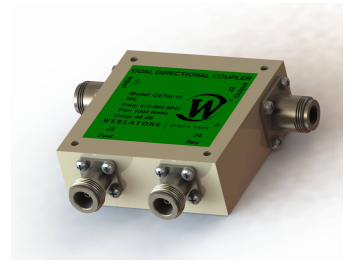


PRODUCT DATA SHEET


C6756

Performance Data (Specifications subject to change without notice):


Coupling:

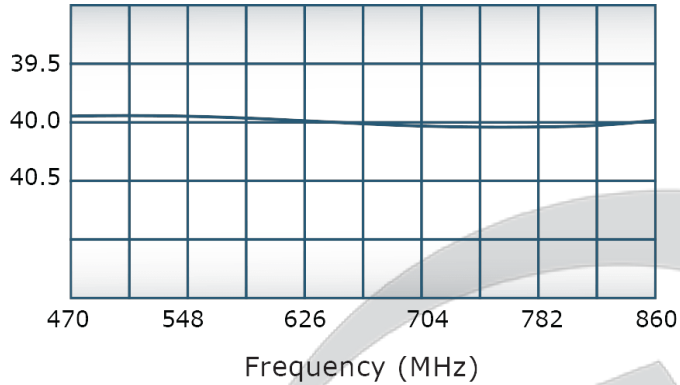


VSWR:

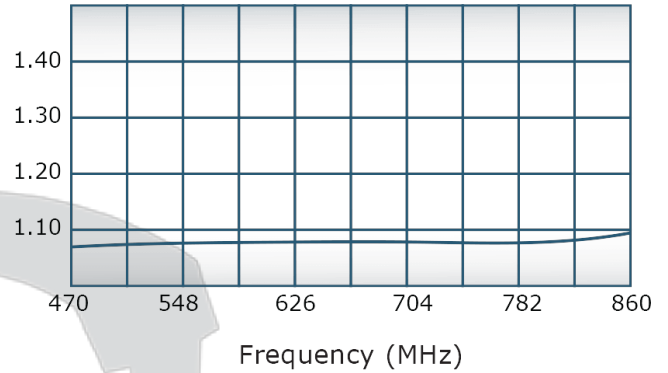

Insertion Loss:

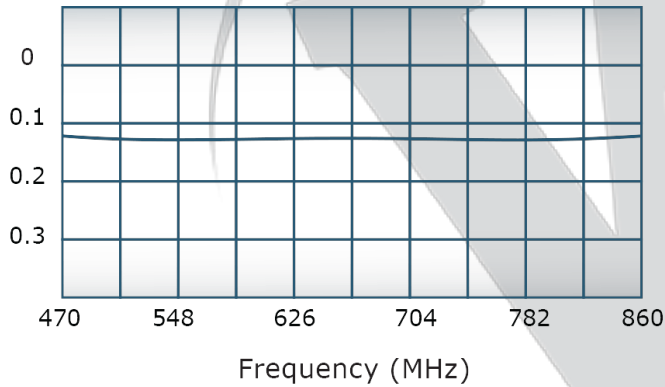


Directivity:

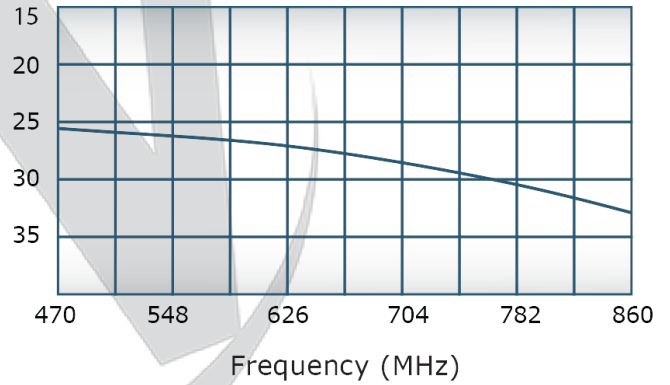

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

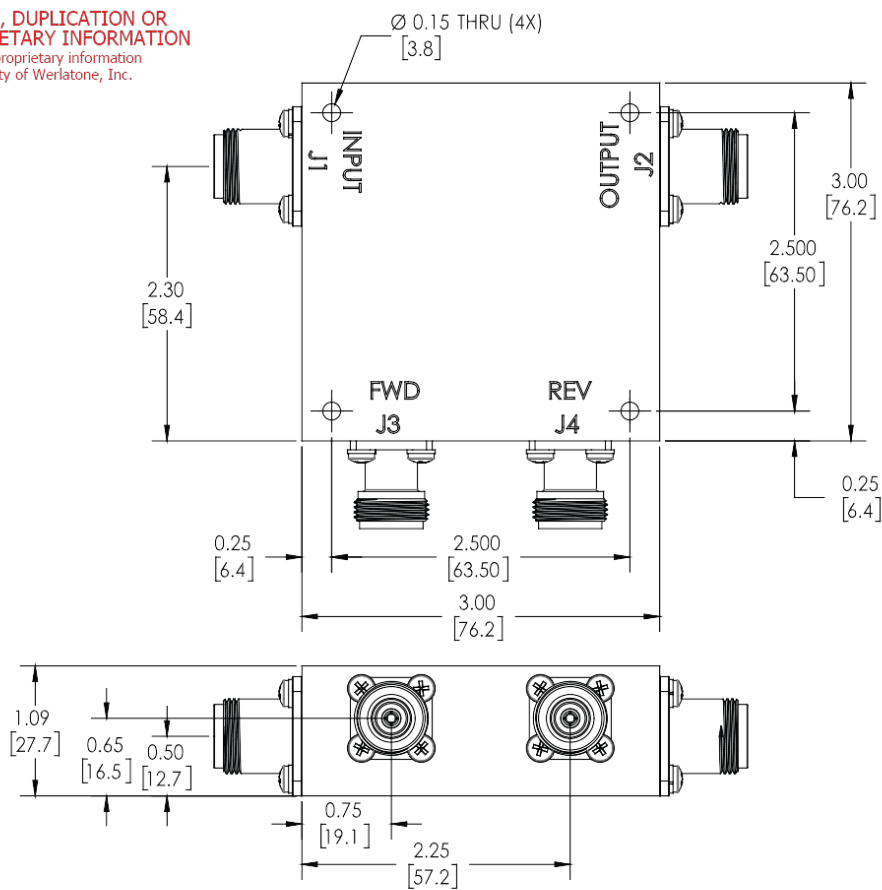

REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE® SINCE 1965	17 Jon Barrett Rd Patterson, NY 12568		
		• INTERPRET DRAWING AS PER: STD-100 • DIMENSIONING PER: ASME Y14.5-2009 • ARCHITECTURAL INFO FOR KEY ONLY • DIMENSIONS ARE IN INCHES • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES • TOLERANCES: ANGLES ± 2° 2 P. ± .002 [13] 3 P. ± .005 [38] • REMOVE ALL BURS AND SHARP EDGES R.25 MIN • CONCENTRICITY MACHINED DIA. ±.002 FIM • MACHINE TOOL REGISTRATION .002 MAX		RH	7/5/2001		 WERLATONE® SINCE 1965		
				CHK	DATE				
				ENGR	DATE				
				MD	7/5/2001				
				RFGR	DATE				
				QA					
				RLSE	DATE				
NEXT ASSY USED ON						SIZE CAGE CODE DWG NO B 10379-505			
APPLICATION		THIRD ANGLE PROJECTION 				SCALE 1:1		SHEET 1 OF 1	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com