

PRODUCT DATA SHEET

C8483

3-Port Uni-Directional Coupler: Consists of a main line and a coupled line. One end of the coupled line is internally terminated, while the other end serves as a coupled port. Ideal for sampling and monitoring power in one direction at a given time. It is necessary to physically reverse the orientation of the unit to change from a forward to a reverse power measurement.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency:	2 - 32 MHz
Power:	500 W CW
Coupling:	10 ± 1.0 dB Max.
Insertion Loss:	0.3 dB Max.
Flatness:	± 0.5 dB Max.
VSWR (ML):	1.30:1 Max.
Directivity:	20 dB Min.


Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Humidity:	95% Non-Condensing
Size:	3.0 x 3.0 x 1.88"

Connector Configurations:


Model	Input (J1)	Output (J2)	Fwd (J3)
C8483-10	N Female	N Female	N Female
C8483-12	N Female	N Female	SMA
C8483-200	BNC	BNC	BNC

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




Performance Data (Specifications subject to change without notice):


Coupling:

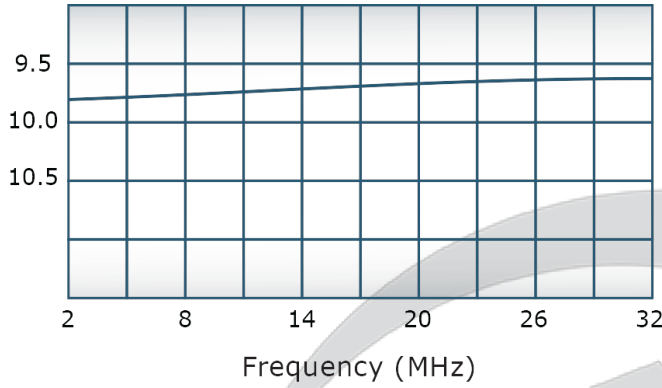


VSWR:

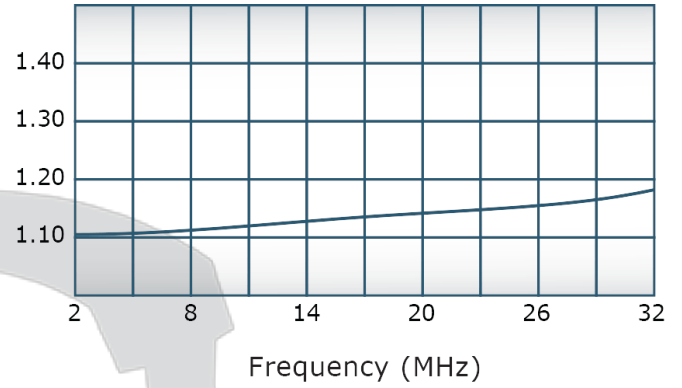

Insertion Loss:




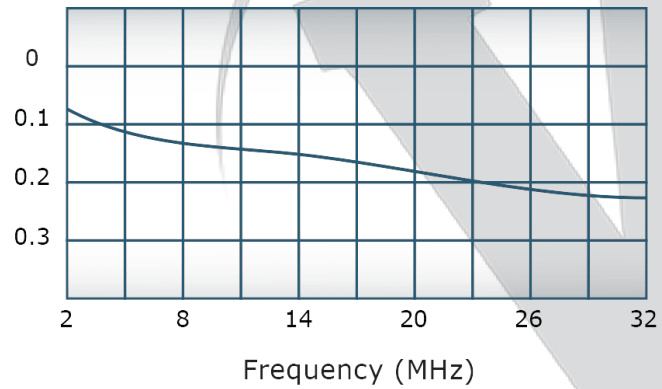


Directivity:

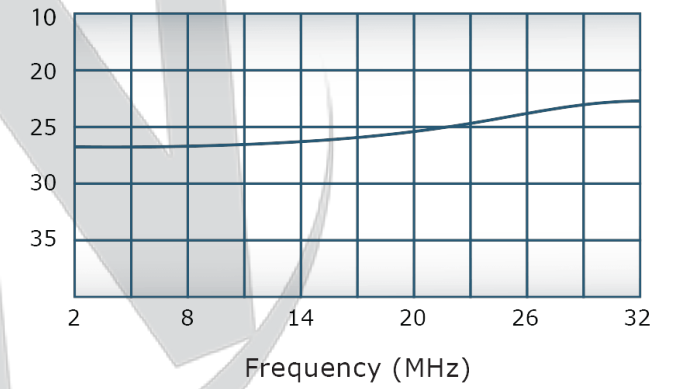

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	INITIAL RELEASE	11/23/2011	

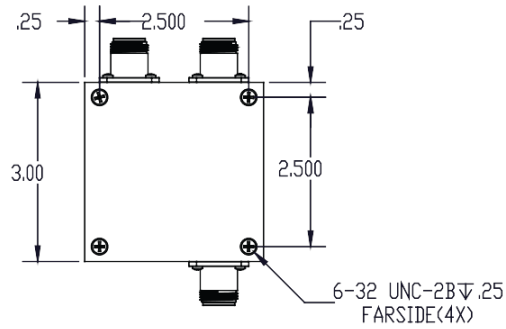

UNLESS OTHERWISE SPECIFIED		DWN	DATE	12/16/2011	WERLATONE SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
1 INTERPRET DRAWING BY MIL-STD-883C	2 DIMENSIONS PER ASME Y14.5M-2009	CHK	DATE		
1 DIMENSIONAL LIMITS APPLY BEFORE FINISHES	1 DIMENSIONS ARE IN INCHES	ENR	DATE		TITLE
1 TOLERANCES/ANGLES ± .01	2 PL & JGS	DFOR	DATE		OUTLINE
1 REMOVE ALL BURRS AND SHARP EDGES R&E MAX	1 CONCENTRICITY MATCHES TOA JGS F&E	QA	DATE		SIZE
1 MACHINE TOOL MISMATCH JGS MAX		RLSE	DATE		CAGE CODE
					DWG NO
					REV
					B 28812 20577-500
					SCALE
					1e
					SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com