



PRODUCT DATA SHEET

C8671

3-Port Uni-Directional Coupler: Consists of a main line and a coupled line. One end of the coupled line is internally terminated, while the other end serves as a coupled port. Ideal for sampling and monitoring power in one direction at a given time. It is necessary to physically reverse the orientation of the unit to change from a forward to a reverse power measurement.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency:	300 - 3000 MHz
Power:	100 W CW
Coupling:	10 ± 1.0 dB Max.
Insertion Loss:	0.35 dB Max.
Flatness:	± 1.0 dB Max.
VSWR (ML):	1.20:1 Max.
Directivity:	15 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Humidity:	95% Non-Condensing
Size:	3.7 x 2.0 x 0.75"
Weight:	9 ounces

Connector Configurations:


Model	Input (J1)	Output (J2)	Fwd (J3)
C8671-10	N Female	N Female	N Female
C8671-12	N Female	N Female	SMA
C8671-102	SMA	SMA	SMA

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




Performance Data (Specifications subject to change without notice):


Coupling:

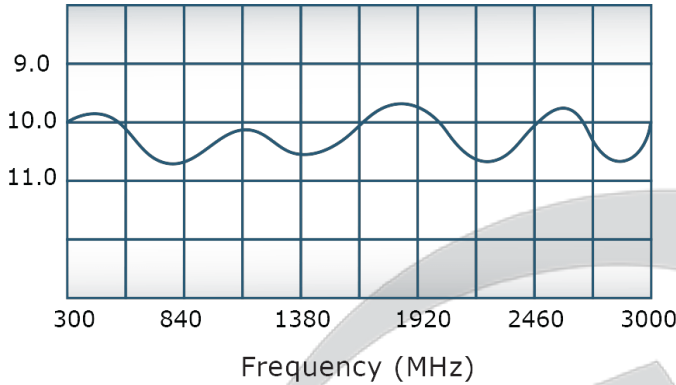


VSWR:

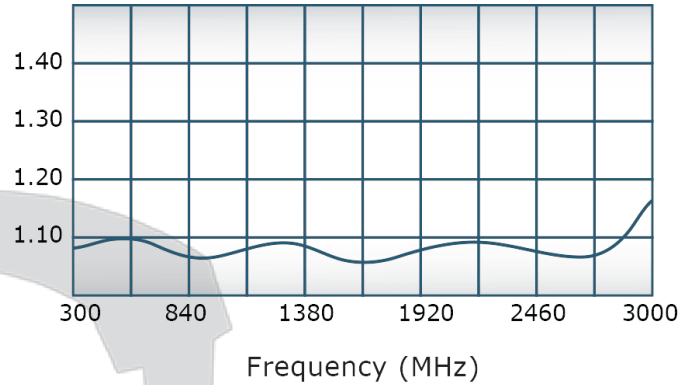

Insertion Loss:




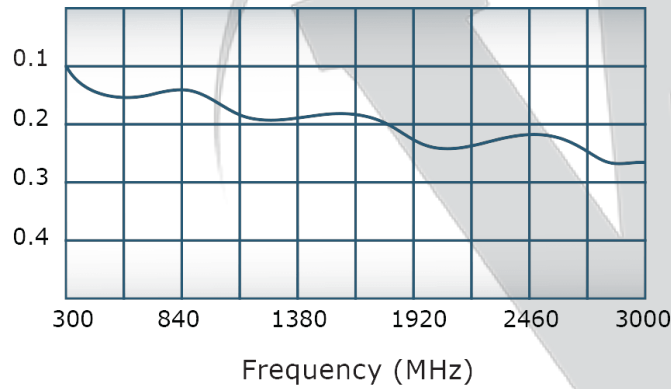


Directivity:

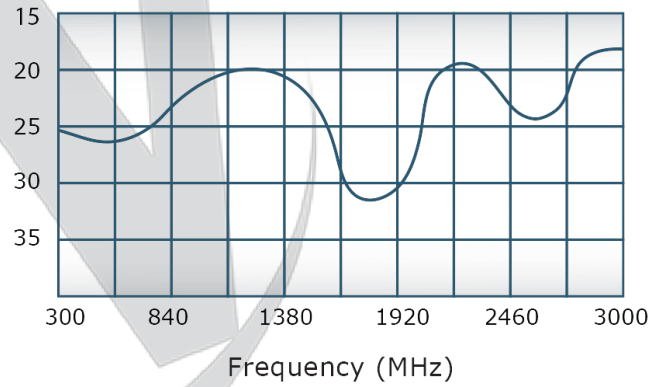

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY					
DATE	REV	REVISION RECORD	AUTH	CHK	APPV

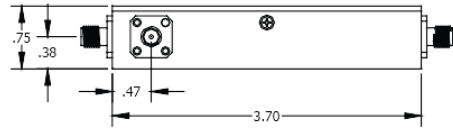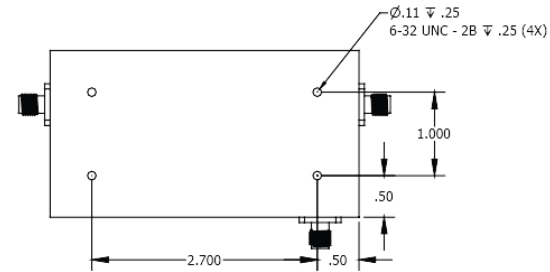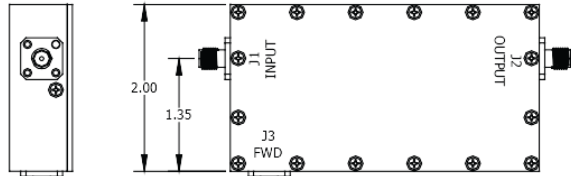

UNLESS OTHERWISE SPECIFIED		DWN	DATE	WERLATONE SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
* INTERPRET DRAWING (AW MIL-STD-100) * DIMENSIONING PER ASME Y14.5M-2009 * PARENTHETICAL DIMS FOR REF ONLY * DIMENSIONS ARE IN INCHES * DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		NH	7/29/2010	
* TOLERANCES: ANGLES = 2° XXX = .005 XX = .015		CHK	DATE	TITLE USED ON C8671
THIRD ANGLE PROJECTION		BW	7/29/2010	
		ENGR	DATE	SIZE CAGE CODE DWG NO A 28812 20678-500
		BW	7/29/2010	
		MFR	DATE	SCALE SHEET 1 OF 1
		QA	DATE	
		RLSE	DATE	REV

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com