

## PRODUCT DATA SHEET

D10903

**Werlatone® Mismatch Tolerant®** High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

### Features:

High Power      Wide Bandwidths      Small Size      High Isolation      Custom Designs Available

### Electrical Specifications:

Frequency: 500 - 1500 MHz  
 Power: 200 W CW  
 Insertion Loss: 0.4 dB Max.  
 VSWR: 1.35:1 Max.  
 Phase Balance:  $\pm 5^\circ$  Max.  
 Amplitude Balance: 0.2 dB Max.  
 Isolation: 15 dB Min.

### Mechanical Specifications:

Type: Connectorized  
 Material: Aluminum 6061-T6  
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available  
 Operating Temperature: -55°C to +75°C  
 Storage Temperature: -60°C to +85°C  
 Weight: 0.75 lbs.  
 Size: 4.7 x 2.0 x 0.8"

### Connector Configurations:


Model	Sum Port (J1)	Input/Output (J2)	Input/Output (J3)
D10903-10	N Female	N Female	N Female
D10903-12	N Female	SMA	SMA
D10903-102	SMA	SMA	SMA

**When specified, Werlatone® High Power Combiners and RF Dividers** will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.



# WERLATONE

Model D10903

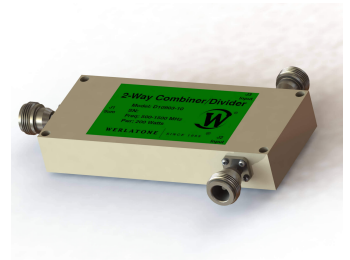


## PRODUCT DATA SHEET


D10903

### Performance Data (Specifications subject to change without notice):


Insertion Loss:

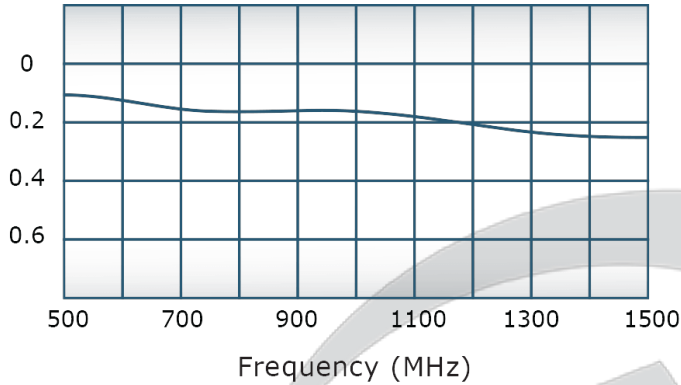


VSWR:

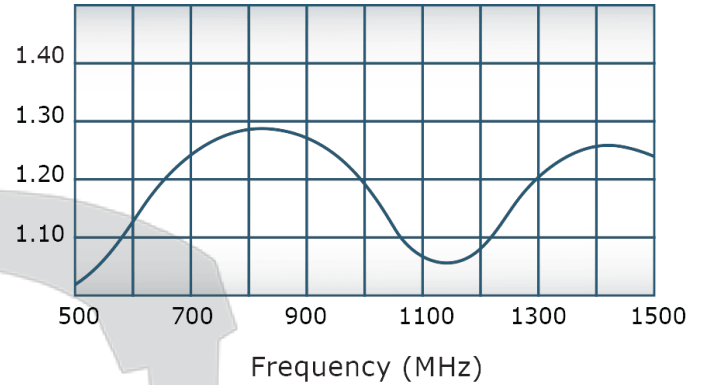

Isolation:

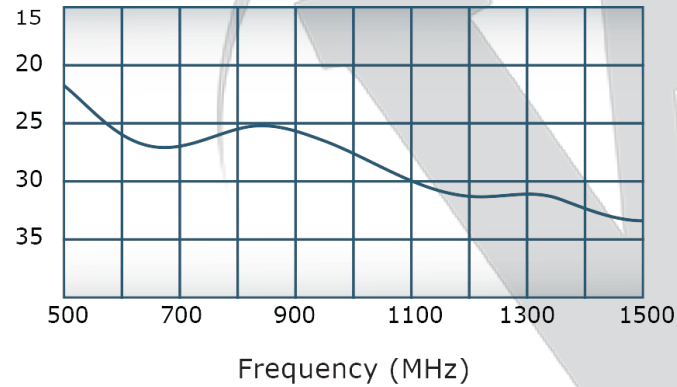

Phase Balance:

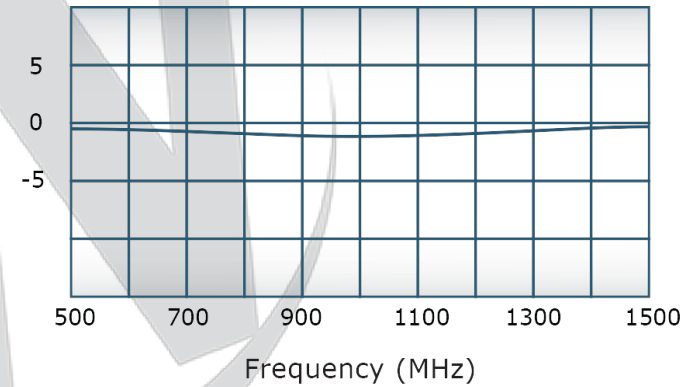

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9173	09/21/16	CS
B	ECN 9696	11/21/19	RB

**NOTES: UNLESS OTHERWISE SPECIFIED**

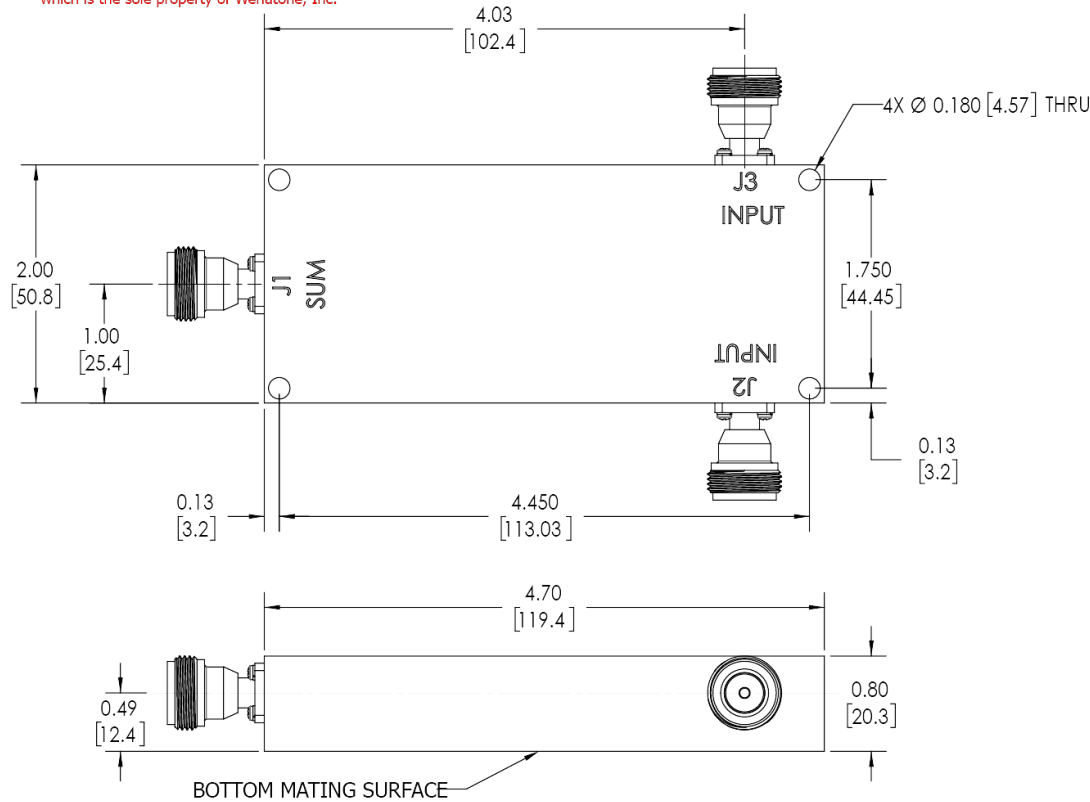- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:  
J1-J3: N FEMALE**



		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE  SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563		
		INTERPRET DRAWING 1001 MIL-STD-100		SD	11/21/2019				
		DIMENSIONS PER ASME Y14.5M-2009		CHK	DATE				
		PARENTHEThICAL INFO FOR REF ONLY		CS	11/21/2019		TITLE		
		DIMENSIONS ARE IN INCHES		ENGR	DATE	<h1>OUTLINE</h1>			
		DIMENSIONAL LIMITS APPLY BEFORE FINISHES		DATE					
		TOLERANCES:				SIZE	CAGE CODE	DWG NO	REV
		ANGLES ± 2°				B		20291-501	B
		3 PL ± .005 [13]				SCALE	1:1		
		2 PL ± .015 [38]							
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX							
		CONCENTRICITY MACHINED DIA. .002 FIM							
		MACHINE TOOL MISMATCH .003 FIM							
		THIRD ANGLE PROJECTION 							
NEXT ASSY		USED ON							
APPLICATION									

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.  
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com