



## PRODUCT DATA SHEET D5215 Werlatone ® Mismatch Tolerant ® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions. Features: High Power Wide Bandwidths Small Size High Isolation Custom Designs Available **Electrical Specifications:** 2400 - 2500 MHz Frequency: Power: 250 W CW Insertion Loss: 0.3 dB Max. VSWR: 1.30:1 Max. Phase Balance: + 5° Max. Amplitude Balance: 0.2 dB Max. Isolation: 20 dB Min. Mechanical Specifications: Connectorized Type: Aluminum 6061-T6 Material: Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available -55°C to +75°C Operating Temperature: -60°C to +85°C Storage Temperature: 6.0 x 3.0 x 1.38" Size: **Connector Configurations:** Model Sum Port (J1) Input/Output (J2) Input/Output (J3) D5215-10 N Female N Female N Female D5215-12 N Female SMA SMA D5215-13 N Female BNC BNC D5215-102 SMA SMA SMA When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



## **PRODUCT DATA SHEET**



D5215

Insertion Loss: 1.40 0 1.30 0.1 1.20 0.2 0.3 1.10 2400 2460 2400 2420 2440 2460 2480 2500 2420 2440 2480 2500 Frequency (MHz) Frequency (MHz) Isolation: Phase Balance: 15 20 5 25 0 30 -5 35 2400 2420 2440 2460 2480 2500 2400 2420 2440 2460 2480 2500 Frequency (MHz) Frequency (MHz)


Performance Data (Specifications subject to change without notice):

VSWR:

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D5215 Rev.-

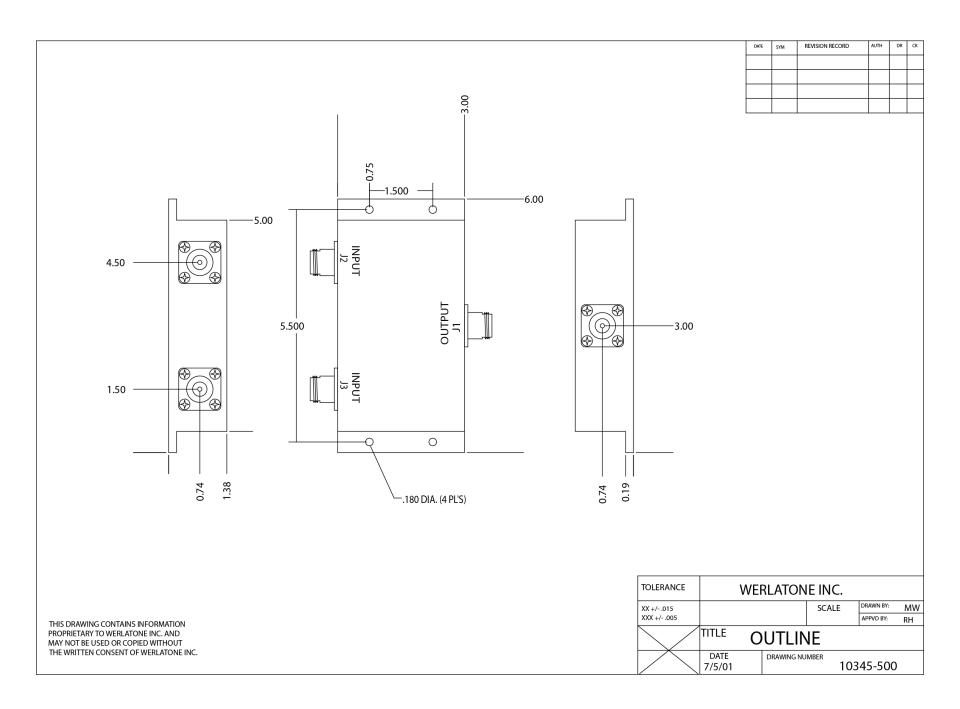

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com