

**PRODUCT DATA SHEET** 



D5877

## Werlatone ® Mismatch Tolerant ® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions. Features: High Power Wide Bandwidths Small Size Custom Designs Available **Electrical Specifications:** 150 - 1000 MHz Frequency: Power: 350 W CW Insertion Loss: 0.5 dB Max. VSWR: 1.30:1 Max. Phase Balance: + 5° Max. Amplitude Balance: 0.25 dB Max. Isolation: Non-Isolated Mechanical Specifications: Connectorized Type: Material: Aluminum 6061-T6 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available -55°C to +75°C Operating Temperature: -60°C to +85°C Storage Temperature: 5 lbs. 4 oz. (-10) Weight: 8.38 x 7.55 x 1.5" Size: **Connector Configurations:** Model Sum Port (J1) Input/Output (J2) Input/Output (J3) D5877-10 N Female N Female N Female D5877-10B N Female N Female N Female \*The D5877-10B has Black Epoxy Paint/White Epoxy Lettering Finish\*

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



## **PRODUCT DATA SHEET**




D5877

## Performance Data (Specifications subject to change without notice): VSWR: Insertion Loss: 1.40 0.1 1.30 0.2 1.20 0.3 0.4 1.10 150 320 490 660 830 1000 150 320 490 660 830 1000 Frequency (MHz) Frequency (MHz) For In-Building Applications: Phase Balance: 5 0 -5 490 660 150 320 830 1000 Frequency (MHz)

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

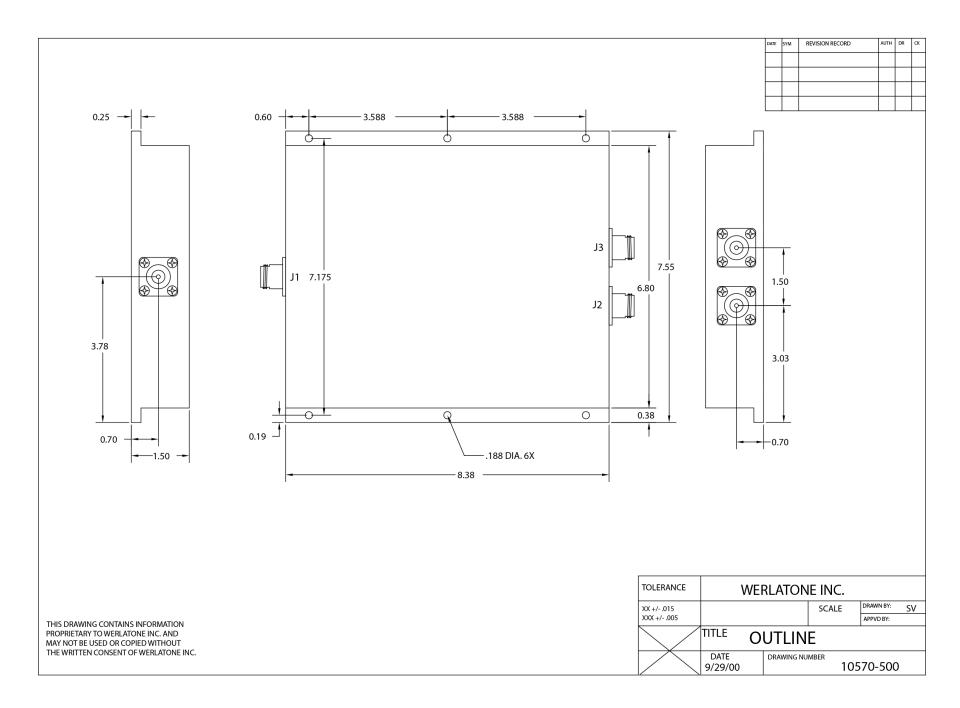

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com