



PRODUCT DATA SHEET

D8606W

Werlatone® Mismatch Tolerant® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power Wide Bandwidths Small Size High Isolation Custom Designs Available

Electrical Specifications:

Frequency: 600 - 3000 MHz
 Power: 200 W CW
 Insertion Loss: 0.5 dB Max.
 VSWR: 1.35:1 Max.
 Phase Balance: $\pm 5^\circ$ Max.
 Amplitude Balance: 0.25 dB Max.
 Isolation: 17 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Humidity: 100% Condensing (Watertight Design)
 Weight: 12.35 oz.
 Size: 4.19 x 2.06 x 1.02"

Connector Configurations:

Model	Sum Port (J1)	Input/Output (J2)	Input/Output (J3)
D8606W-10	N Female	N Female	N Female

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.



WERLATONE

Model D8606W




PRODUCT DATA SHEET


D8606W

Performance Data (Specifications subject to change without notice):


Insertion Loss:

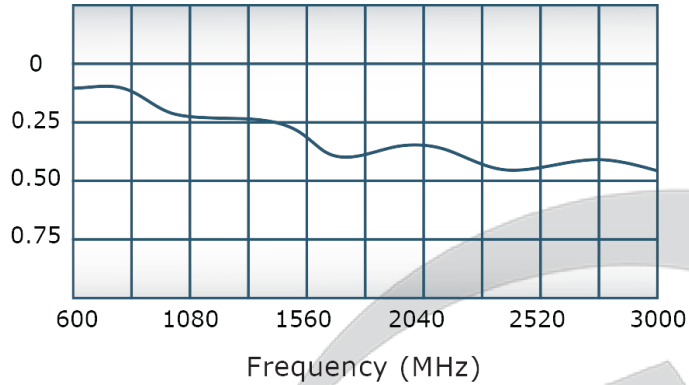


VSWR:

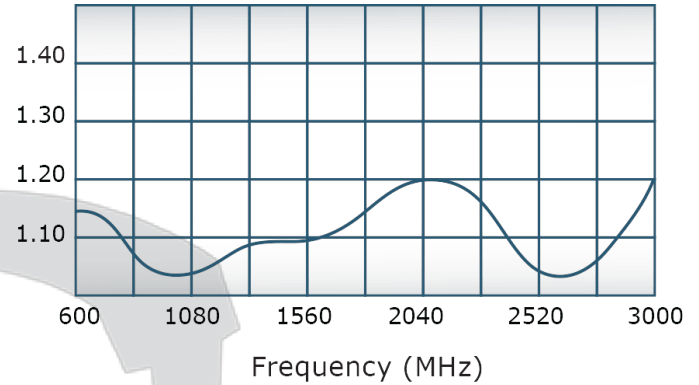

Isolation:

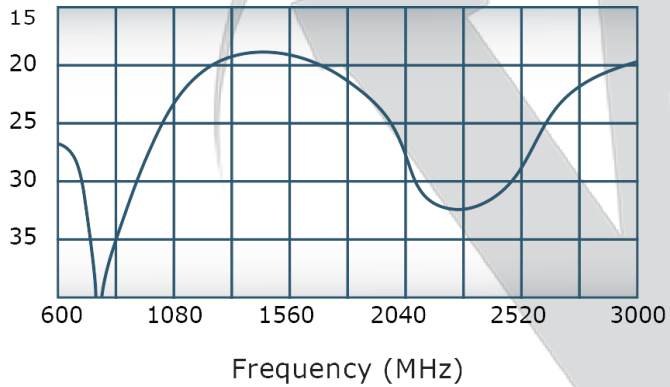

Phase Balance:

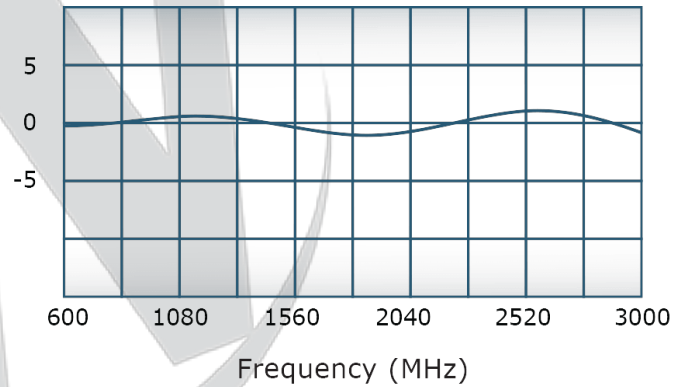

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information
which is the sole property of Werlatone, Inc.

REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
A	NEW RELEASE	8/12/2020	RB

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)
3. CONNECTORS:
J1-J3: FEMALE

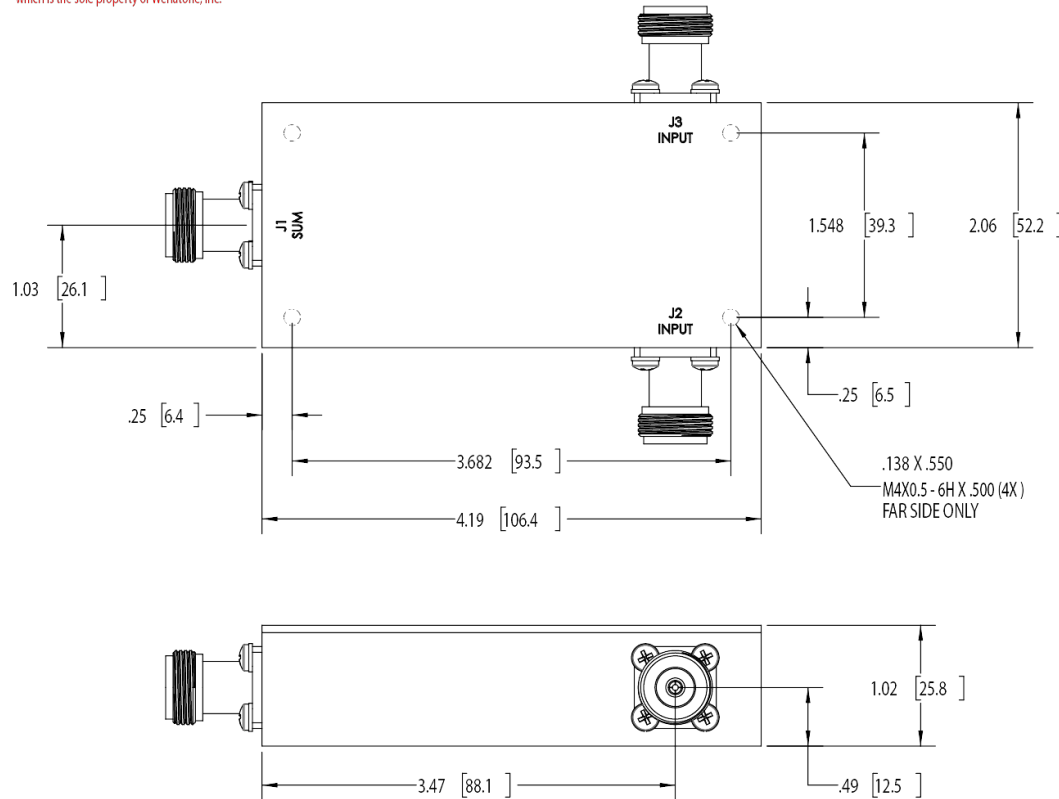

UNLESS OTHERWISE SPECIFIED		OWN	DATE	WERLATONE		SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563
INTERPRET DRAWING AND MIL-STD-883C	SD	DATE	8/12/2020	TITLE		OUTLINE	
CONFORM TO MIL-STD-883C	CHK	DATE	8/12/2020				
INTERPRETATION INFO FOR REF ONLY	CS	DATE	8/12/2020				
CONFORM TO MIL-STD-883C	ENGR	DATE					
CONFORM TO MIL-STD-883C	DATE	DATE		SIZE		CASE CODE	
CONFORM TO MIL-STD-883C	DATE	DATE		B		20613-502	
CONFORM TO MIL-STD-883C	DATE	DATE		SCALE		1:1	
CONFORM TO MIL-STD-883C	DATE	DATE		SHEET		1 OF 1	
CONFORM TO MIL-STD-883C	DATE	DATE		REV		A	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com