



PRODUCT	DATA SHEET				D9144
	Werlatone Mismatch Tolerant High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.				
	Features:				
	High Power	Wide Bandwidths	Small Size	High Isolation	Custom Designs Available
	Electrical Specifications:				
	Frequency: $400 - 500 \text{ MHz}$ Power: 25 W CW Insertion Loss: 0.75 dB Max .VSWR: $1.35:1 \text{ Max}$.Phase Balance: $\pm 5^{\circ} \text{ Max}$.Amplitude Balance: 0.3 dB Max .Isolation: 20 dB Min .Mechanical Specifications:Type:ConnectorizedMaterial:Aluminum 6061-T6Surface Finish:Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant AvailableOperating Temperature: -55° C to $+75^{\circ}$ CStorage Temperature: -60° C to $+85^{\circ}$ CSize: $3.0 \times 1.6 \times 0.8^{"}$				
	Connector Configurations:				
		Sum Port (J1) Inp SMA SM	a ut/Output (J2)	Input/Outpo SMA	ut (j3)
	When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.				

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



PRODUCT DATA SHEET




D9144

Performance Data (Specifications subject to change without notice): VSWR: Insertion Loss: 1.40 0 1.30 0.3 1.20 0.6 0.9 1.10 440 460 500 400 420 440 460 480 500 400 420 480 Frequency (MHz) Frequency (MHz) Isolation: Phase Balance: 10 20 5 30 0 40 -5 50 420 440 460 480 440 400 500 400 420 460 480 500 Frequency (MHz) Frequency (MHz)

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D9144 Rev.-

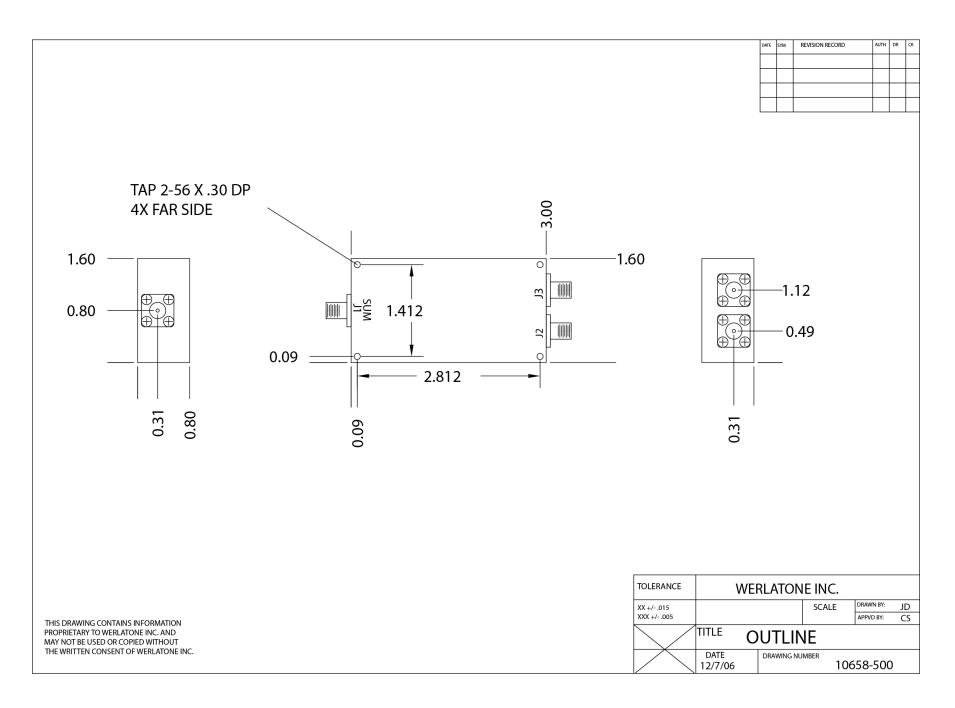

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com