



D9493

PRODUCT DATA SHEET Werlatone ® Mismatch Tolerant ® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions. Features: High Power Wide Bandwidths Small Size Custom Designs Available **Electrical Specifications:** 400 - 500 MHz Frequency: Power: 100 W CW Insertion Loss: 0.4 dB Max. VSWR: 1.30:1 Max. Phase Balance: + 3° Max. Amplitude Balance: 0.25 dB Max. Isolation: No Isolation Mechanical Specifications: Connectorized Type: Aluminum 6061-T6 Material: Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available -55°C to +75°C Operating Temperature: -60°C to +85°C Storage Temperature: Weight: 3 lbs. 9.5 x 4.1 x 1.125" Size: **Connector Configurations:** Sum Port (J9) Input/Output (J1-J8) Model D9493-10 N Female N Female When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



PRODUCT DATA SHEET



D9493

Performance Data (Specifications subject to change without notice): VSWR: Insertion Loss: 1.40 1.30 0.2 1.20 0.4 0.6 1.10 420 500 400 420 440 460 480 500 400 440 460 480 Frequency (MHz) Frequency (MHz) Phase Balance: For In-Building Applications: 5

0

-5

400

420

440

460

Frequency (MHz)


480

500

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D9493 Rev.-

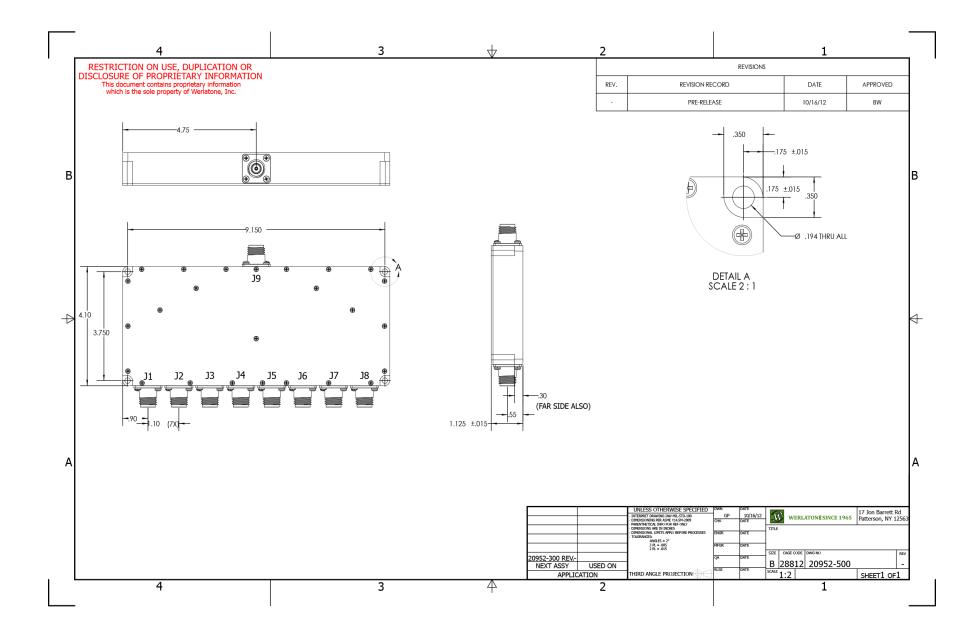

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com