



PRODUC	T DATA SHEET H	18837W
	<b>Werlatone</b> Wigh Power 180° RF Hybrid Combiners/Dividers balance traditional technologies with disr microwave techniques. The outcome is a microwave component which provides an order of magnitude improvement over current capabilities. Our newest line of high power, patented 180° RF Hybrid Combiners/Dividers provides an incredible 5:1 bandwidth, while exhibiting exceptionally low loss and su port-to-port isolation.	1
	Features:	
	High Power Wide Bandwidths Small Size Excellent Amplitude Balance	
	Electrical Specifications:	
	Frequency: $20 - 512 \text{ MHz}$ Power: $100 \text{ W CW}$ Insertion Loss: $0.6 \text{ dB Max}$ .VSWR: $1.40:1 \text{ Max}$ .Phase Balance: $180^\circ \pm 5^\circ \text{ Max}$ .Amplitude Balance: $\pm 0.4 \text{ dB Max}$ .Isolation: $20 \text{ dB Min}$ .Mechanical Specifications:	
	Type:ConnectorizedMaterial:Aluminum 6061-T6Surface Finish:Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant AvailableOperating Temperature:-55°C to +75°CStorage Temperature:-60°C to +85°CWeight:0.75 lbs.Size:4.7 x 2.3 x 0.8''Watertight Model:O-Ring Sealed Case and Connectors	
	Connector Configurations:	
	Model H8837W-102Sum Port (J4) SMAInputs (J2,J3) SMA	
	<b>Werlatone's</b> standard line of High Power 180° RF Hybrid Combiners/Dividers covers multiple octaves of microwave device. Low frequency 180° Hybrid Combiner/Dividers employ proprietary ferrite transmissi techniques, similar to our 0° Combiners/Dividers. Insertion loss in both sum and difference ports is min allowing the hybrid to handle high power over its frequency range. Custom requirements are welcome.	ion line imal,

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



## **PRODUCT DATA SHEET**




VSWR: Insertion Loss: 1.40 1.30 0.3 1.20 0.6 1.10 0.9 Frequency (MHz) Frequency (MHz) Isolation: Phase Balance: Frequency (MHz) Frequency (MHz)

Performance Data (Specifications subject to change without notice):

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

H8837W Rev.-

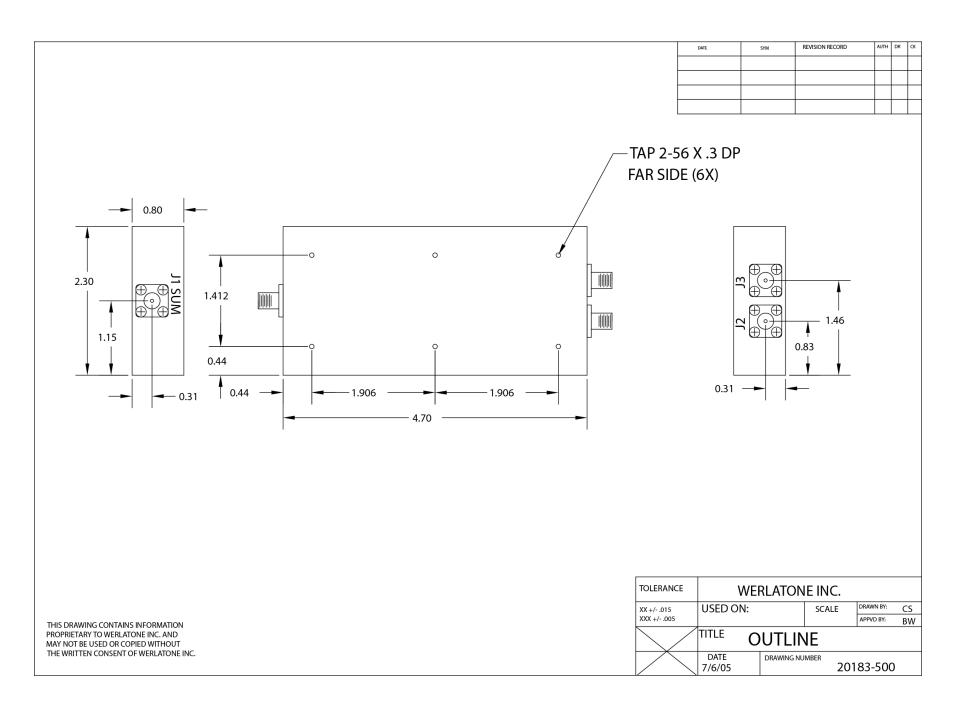

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com