



PRODUCT DATA SHEET

QH9141

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount

Electrical Specifications:

Frequency: 150 - 2000 MHz
 Power: 150 W CW
 Insertion Loss: 0.85 dB Max.
 VSWR: 1.40:1 Max.
 Phase Balance: $90^\circ \pm 5^\circ$ Max.
 Amplitude Balance: ± 0.75 dB Max.
 Isolation: 18 dB Min.

Mechanical Specifications:

Type: Connectorized
 Material: Aluminum 6061-T6
 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
 Operating Temperature: -55°C to +75°C
 Storage Temperature: -60°C to +85°C
 Weight: 8 oz.
 Size: 2.0 x 2.0 x 1.06"

Connector Configurations:

Model	Sum Port (J1)	0°, 90° (J2,J3)	Ext. Load Port
QH9141-10	N Female	N Female	N Female
QH9141-12	N Female	SMA	SMA
QH9141-102	SMA	SMA	SMA
QH9141-300	TNC	TNC	TNC

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.



Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



WERLATONE

Model QH9141




PRODUCT DATA SHEET


QH9141

Performance Data (Specifications subject to change without notice):


Coupling:

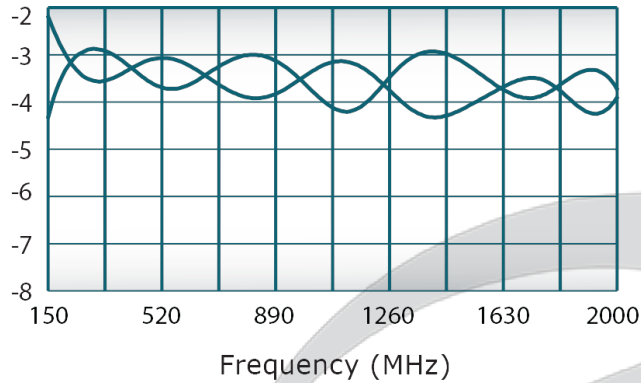


VSWR:

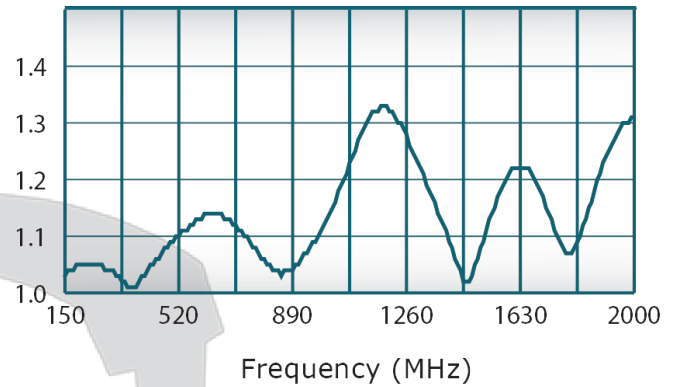

Isolation:

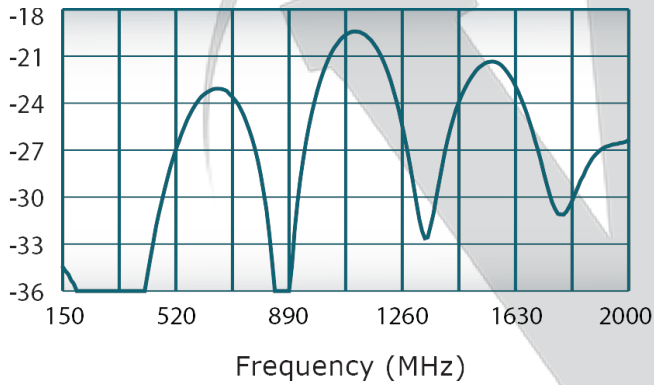

Phase Balance:



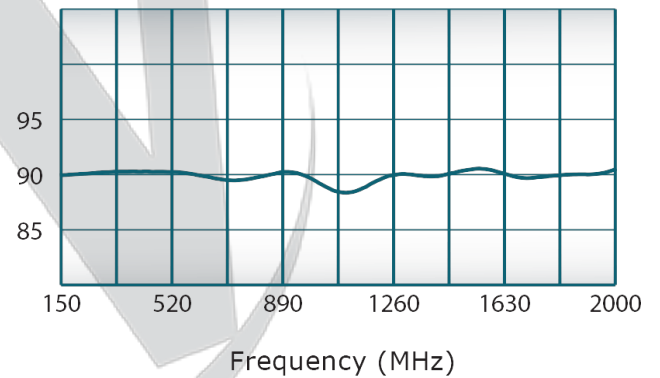


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

n.149 THRU (4X)

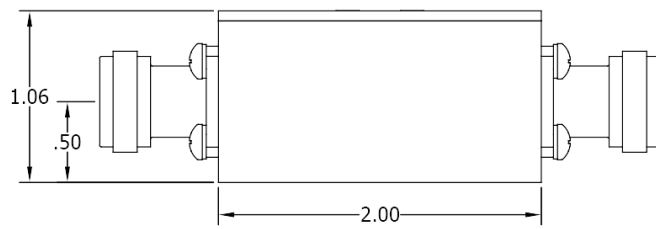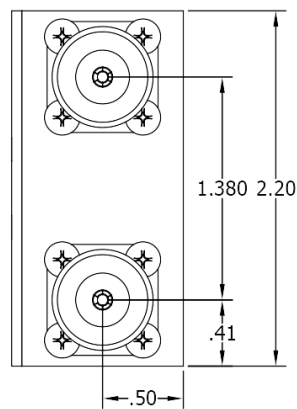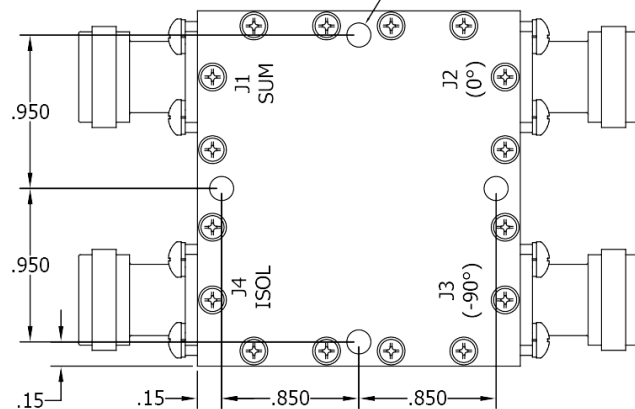

REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
-	INITIAL RLS	10/7/2011	BW

		UNLESS OTHERWISE SPECIFIED		DWN	DATE	 WERLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563	
		• INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		NH	10/6/2011				
		• DIMENSIONING PER ASME Y14.5M-2009		CHK	DATE				
		• PARENTHETICAL INFO FOR REF ONLY		BW	10/7/2011	TITLE			
		• DIMENSIONS ARE IN INCHES		ENGR	DATE				
		• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		BW	10/7/2011				
		• TOLERANCES: ANGLES ± 2°		MFGR	DATE				
		.XXX ± .005		QA	DATE				
		.XX ± .015		RLSE	DATE				
		• HOLE TOLERANCES +.004/- .001				SIZE		CAGE CODE	DWG NO
		• REMOVE ALL BURRS AND SHARP EDGES				A		28812	20810-500
		R.01 MAX							
		• CONCENTRICITY MACHINED DIA: .002 FIM							
		• MACHINE TOOL MISMATCH: .003 MAX							
QH9141						SCALE			
NEXT ASSY		USED ON							
APPLICATION									
		THIRD ANGLE PROJECTION 							

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com