

PRODUCT DATA SHEET
QH9386
Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Connectorized Drop-In & Surface Mount

Electrical Specifications:

Frequency: 20 - 520 MHz
Power: 25 W CW
Insertion Loss: 0.6 dB Max.
VSWR: 1.40:1 Max.
Phase Balance: $90^\circ \pm 10^\circ$ Max.
Amplitude Balance: ± 1.0 dB Max.
Isolation: 20 dB Min.

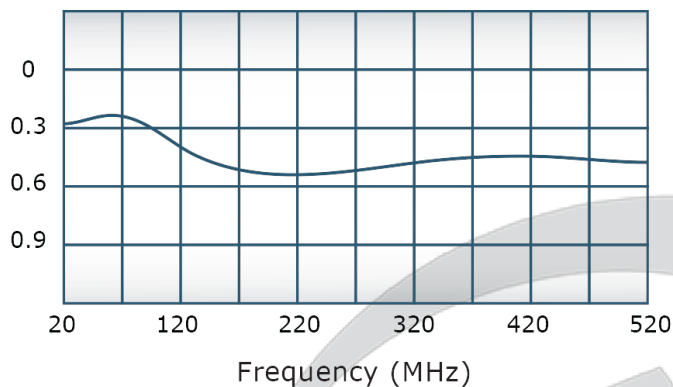
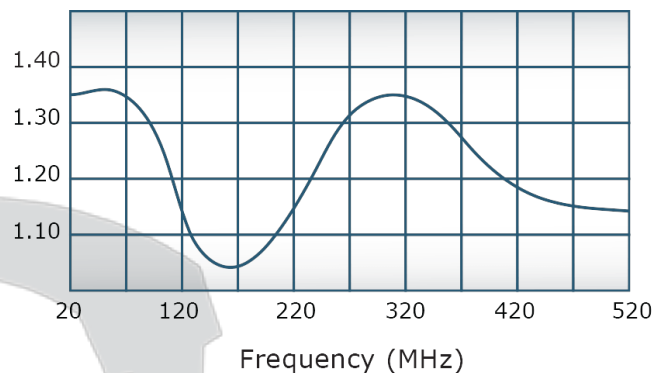
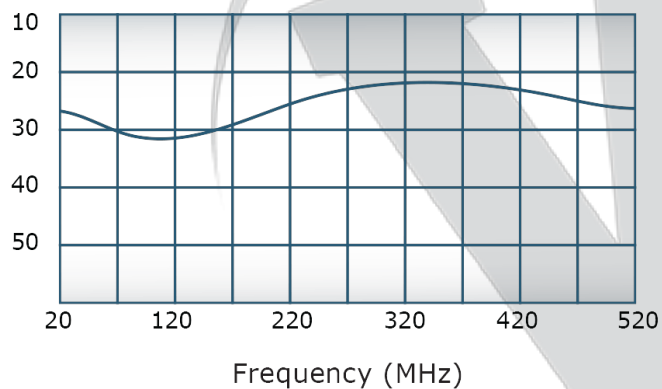
Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Size: 2.7 x 2.7 x 1.25"

Connector Configurations:

Model	Sum Port (J1)	Inputs/Outputs (J2,J3)
QH9386-10	N Female	N Female
QH9386-12	N Female	SMA Female
QH9386-102	SMA Female	SMA Female

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

Performance Data (Specifications subject to change without notice):
Insertion Loss:

VSWR:

Isolation:

Phase Balance:
