



## PRODUCT DATA SHEET

WPM11322

### Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

### VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

### Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

### General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (safety feature).
- Alarm, activated switch.

### Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters)
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

### Accuracy:

- $\pm 2\%$  to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$  over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

### Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available)
- Via RS485 (Via Single Channel or Multi-Channel Displays)

### Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available  
Custom Connector Configurations Available

### Electrical Specifications:

Frequency: 1.5 - 100 MHz  
Power: 10,000 W CW

### Mechanical Specifications:

Type: Connectorized  
Operating Temperature:  $-55^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$   
Storage Temperature:  $-60^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

### Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11322-83	1 5/8" EIA	1 5/8" EIA


**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
This document contains proprietary information which is the sole property of Werlatone, Inc.

J1  
INPUT ONLY  
FIXED FLANGE



J2  
OUTPUT ONLY  
SWIVEL FLANGE

# REVISION HISTORY



REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	7/6/2020	CS
A	ECN 9965	9/29/2020	CS

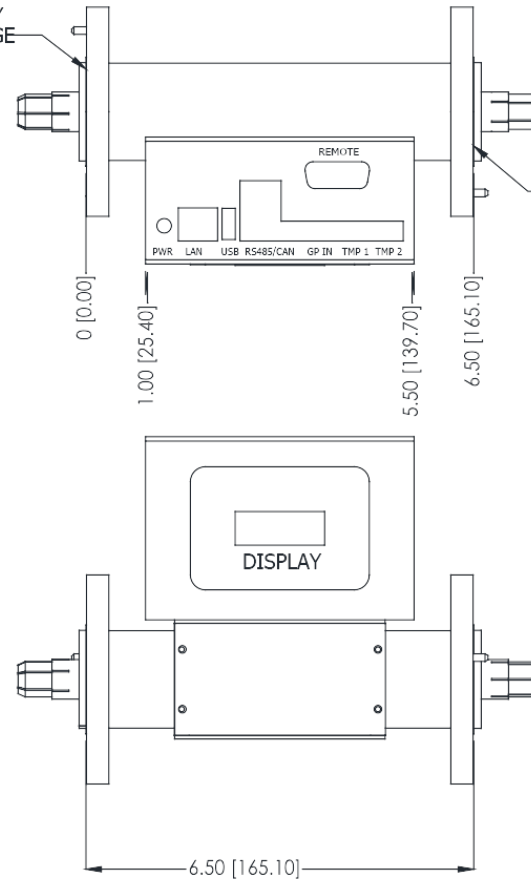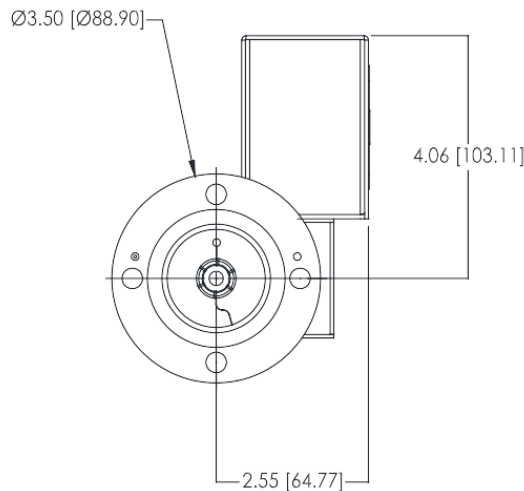

VIEW FOR REFERENCE ONLY



**NOTES: UNLESS OTHERWISE SPECIFIED**  
**1. CONNECTORS: J1-J2 1 5/8 (EIA)**

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563	TITLE  <b>OUTLINE</b>  SIZE <b>B 28812</b> SCALE <b>1:2</b>	DWG NO <b>21340-505</b>  SHEET <b>1</b> OF <b>1</b>	REV <b>A</b>				
		<ul style="list-style-type: none"><li>• INTERPRET DRAWING PER MSL STD-100</li><li>• CONFORMING PER ASME Y14.3M 2009</li><li>• DIMENSIONAL TOLERANCES FOR REF ONLY</li><li>• DIMENSIONS ARE IN INCHES (mm)</li><li>• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES</li><li>• TOLERANCES:     - ANGLES ± 2°     - 2 PL ± .001 (13)     - 2 PL ± .015 (4)</li><li>• REMOVE ALL BURS AND SHARP EDGES 0.01 MAX</li><li>• CONCENTRICITY MACHINED DIA: .002 FDM</li><li>• MACHINE TOOL REPAIRS .002 MAX</li></ul>	PLP	7/24/2015									
			CHK	DATE									
			CS	7/6/2020									
			ENGR	DATE									
			INGR	DATE									
			QA	DATE									
			RLSE	DATE									
APPLICATION		THIRD ANGLE PROJECTION 											
NEXT ASSY	WPM11073	USED ON											

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.  
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com