



PRODUCT DATA SHEET

WPM11351

Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (safety feature).
- Alarm, activated switch.

Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters)
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:

- $\pm 2\%$ to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$ over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available)
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency: 100 - 500 MHz
Power: 1000 W CW

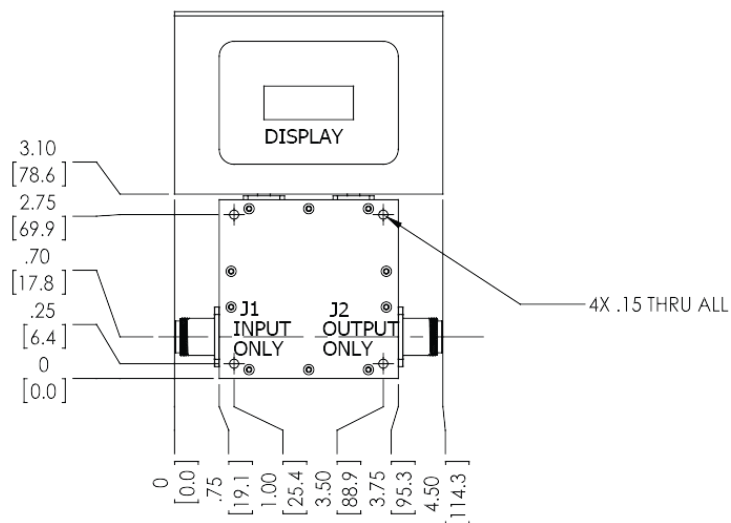
Mechanical Specifications:



Type: Connectorized
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C

Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11351-12	N Female	N Female
WPM11351-612	N Female	N Male
WPM11351-712	N Male	N Female

This document contains proprietary information
which is the sole property of Werlatone, Inc.



UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATA SINCE 1965	17 Jon Barnett Rd Patterson, NY 12556
* INTERPRET DRAWING AND MFG. STD. 1000 * DIMENSIONING PER ASME Y14.5-2009 * PARENTHETICAL DIMS FOR REF. ONLY * DIMENSIONS ARE IN INCHES (mm) * DIMENSIONAL LIMITS APPLY BEFORE FINISHES * TOLERANCES:		PLP	8/10/2017		
		CHK	DATE		
		CS	8/10/2017	TITLE	
		ENGR	DATE		
		MFR	DATE		
		QA	DATE	SIZE	CAGE CODE DWG NO
WPM11072 NEXT ASY USED ON				B 28812	21511-503
APPLICATION		SCALE	DATE	1:2	SHEET 1 OF 1
THIRD ANGLE PROJECTION					

•