



PRODUCT DATA SHEET

WPM11368

Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (safety feature).
- Alarm, activated switch.

Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters)
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:

- $\pm 2\%$ to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$ over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available)
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency: 50 - 500 MHz
Power: 500 W CW

Mechanical Specifications:

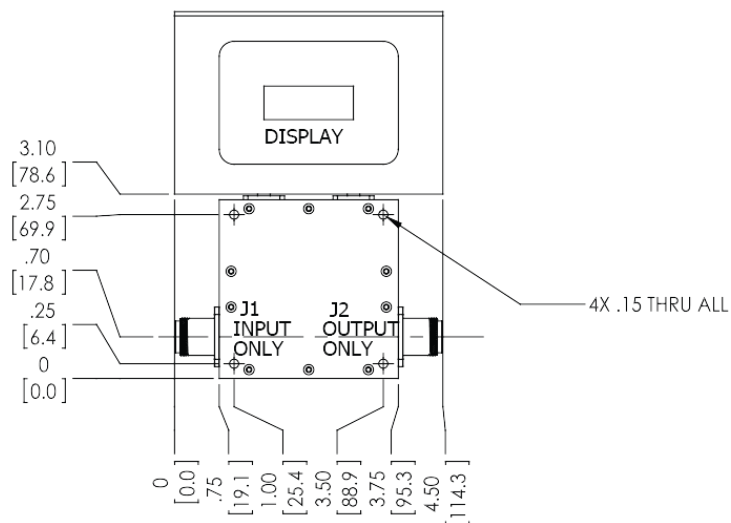
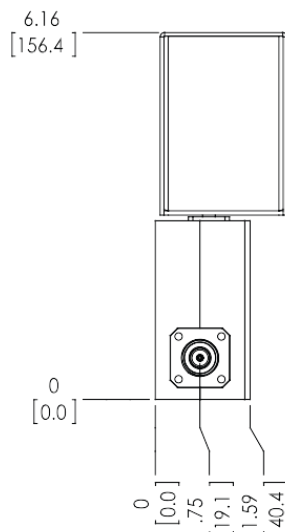
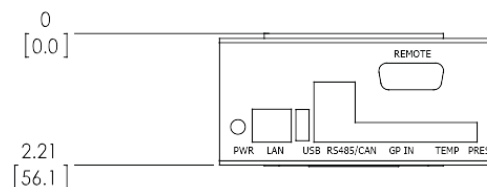
Type: Connectorized
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C



Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11368-12	N Female	N Female
WPM11368-612	N Female	N Male
WPM11368-712	N Male	N Female

This document contains proprietary information
which is the sole property of Werlatone, Inc.

REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	8 11 2017	CS



UNLESS OTHERWISE SPECIFIED • INTERPRET DRAWING PER PER STD-000 • DIMENSIONS PER ASME Y14.5-2009 • PREDUCTIVE TOL. 3X OF LIST ONLY • DIMENSIONS ARE IN INCHES (MM) • DIMENSIONAL LIMITS APPLY BEFORE PROCESSES • TOLERANCES: ANGLES ± 2° 2 PL. ± .002 (.13) 2 PL. ± .015 (.4) • REMOVE ALL BURRS AND SHARP EDGES R.01 MAX • CONDUCTIVITY MACHINED SUR. AND FIN • FINISH: TOOL FINISH (20-160)		OWN	DATE	 WERLANGE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12566	
		PLP	8/10/2017				
WPM11072 USED ON		CHK	DATE	TITLE			
		CS	8/10/2017				
NEXT ASSY APPLICATION		ENGR	DATE	SIZE CAGE CODE DWG NO B 28812 21511-503		RE	
		MPGR	DATE				
THIRD-ANGLE PROJECTION 		QA	DATE	SCALE 1:2		SHEET 1 OF 1	
		RLSE	DATE				

Verlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com