



PRODUCT DATA SHEET

WPM11510

Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (safety feature).
- Alarm, activated switch.

Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters)
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:

- $\pm 2\%$ to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$ over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available)
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency: 500 - 2500 MHz
Power: 100 W CW

Mechanical Specifications:




Type: Connectorized
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C


Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11510-12	N Female	N Female
WPM11510-22	7/16 Female	7/16 Female
WPM11510-612	N Female	N Male
WPM11510-712	N Male	N Female

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	8/11/2017	CS

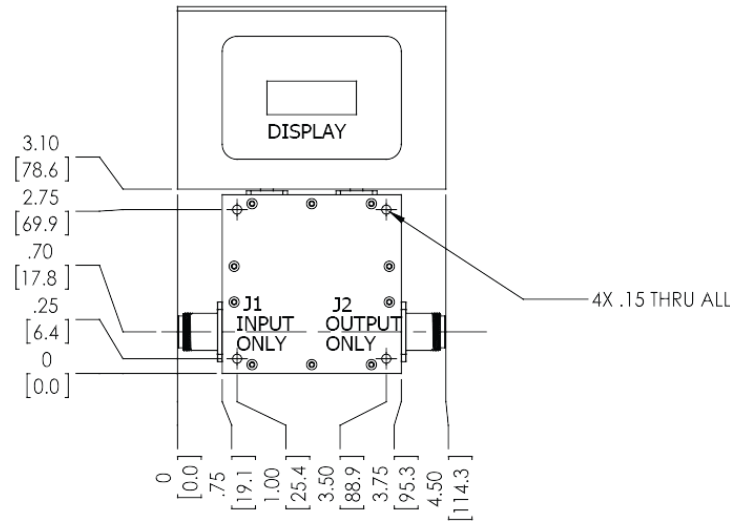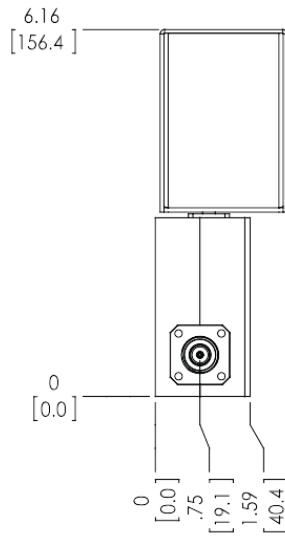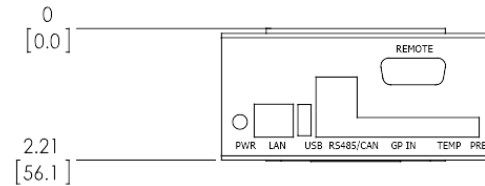

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563	
		<ul style="list-style-type: none"> INTERPRET DRAWING DAW MRL-STD-100 DRAWING PER ASME Y14.3M-2009 PARENTHESES DIMS FOR REF ONLY DIMENSIONS ARE IN INCHES (MM) DIMENSIONAL LIMITS APPLY BEFORE PROCESSES TOLERANCES: <ul style="list-style-type: none"> ANGLES ± 2° 3 PL ± .005 (.13) 2 PL ± .015 (.4) REMOVE ALL BURRS AND SHARP EDGES R.61 MAX CONCENTRICITY RACHINED DIA. .002 FIM FACILITE TOOL REPAIR CH. .003 MAX 		PLP	8/10/2017				
				CHK	DATE	TITLE			
				CS	8/10/2017				
				ENGR	DATE				
				MPGR	DATE				
				QA	DATE				
				RLSE	DATE				
WPM11072				SIZE		CAGE CODE		DWG NO	
NEXT ASSY USED ON				B		28812		21511-503	
APPLICATION		THIRD ANGLE PROJECTION		SCALE		1:2		SHEET 1 OF 1	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com