

PRODUCT DATA SHEET



D1572

Werlatone ® Mismatch Tolerant ® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions. Features: High Power Wide Bandwidths Small Size High Isolation **Custom Designs Available Electrical Specifications:** 1 - 1000 MHz Frequency: Power: 50 W CW Insertion Loss: 1.2 dB Max. VSWR: 1.50:1 Max. Phase Balance: + 6° Max. Amplitude Balance: 0.5 dB Max. Isolation: 20 dB Min. Mechanical Specifications: Connectorized Type: Aluminum 6061-T6 Material: Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available -55°C to +75°C Operating Temperature: -60°C to +85°C Storage Temperature: Weight: 2 lbs. 5.0 x 6.0 x 2.25" Size: **Connector Configurations:** Sum Port (J5) Input/Output (J1-J4) Model N Female N Female D1572-10 D1572-12 N Female SMA D1572-102 SMA SMA When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D1572 Rev.-



PRODUCT DATA SHEET




D1572

Performance Data (Specifications subject to change without notice): VSWR: Insertion Loss: 1.40 0.25 1.30 0.50 1.20 0.75 1.10 1.00 400 600 200 400 600 800 1000 1 200 800 1000 1 Frequency (MHz) Frequency (MHz) Isolation: Phase Balance: 20 25 5 30 0 35 -5 40 200 400 600 800 1000 1 200 400 600 800 1000 1 Frequency (MHz) Frequency (MHz)

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D1572 Rev.-

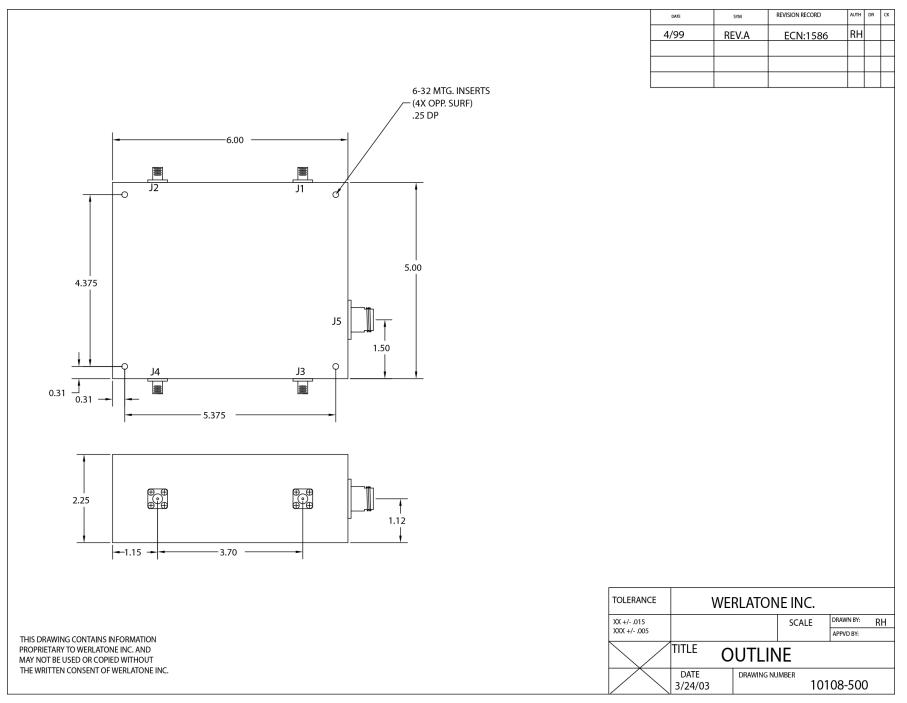

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com