
PRODUCT DATA SHEET
C6529

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 800 - 2800 MHz
Power: 100 W CW
Coupling: 30 ± 1.0 dB Max.
Insertion Loss: 0.3 dB Max.
Flatness: ± 0.5 dB Max.
VSWR (ML): 1.30:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 3.0 x 3.0 x 1.09"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C6529-10	N Female	N Female	N Female	N Female
C6529-12	N Female	N Female	SMA	SMA
C6529-13	N Female	N Female	BNC	BNC
C6529-102	SMA	SMA	SMA	SMA
C6529-610	N Female	N Male	N Female	N Female
C6529-714	N Male	N Female	N Female	N Female


Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C6529

Connectorized Directional Couplers

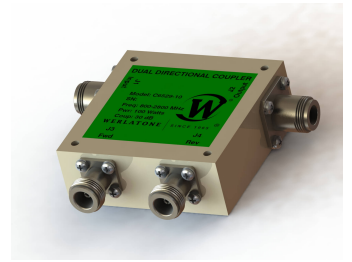


PRODUCT DATA SHEET


C6529

Performance Data (Specifications subject to change without notice):


Coupling:

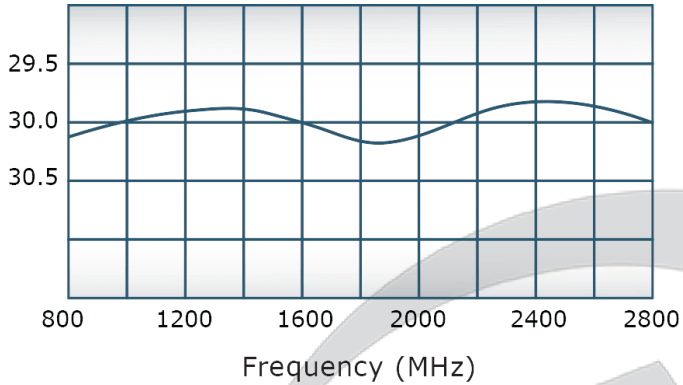


VSWR:

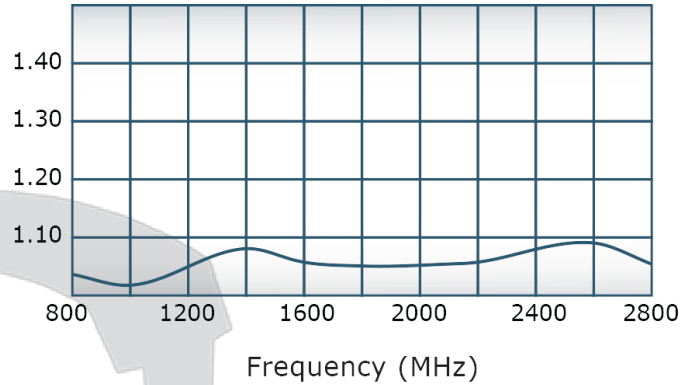

Insertion Loss:

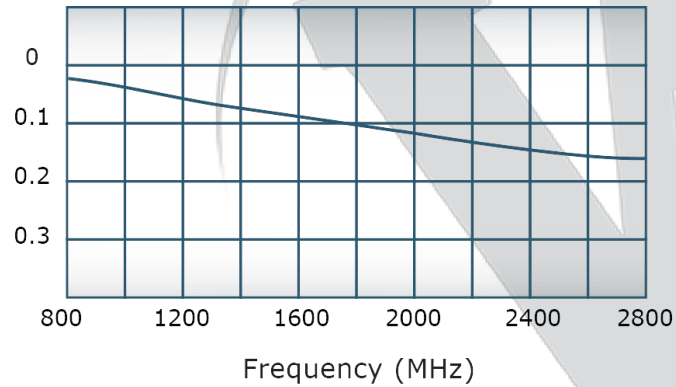

Directivity:

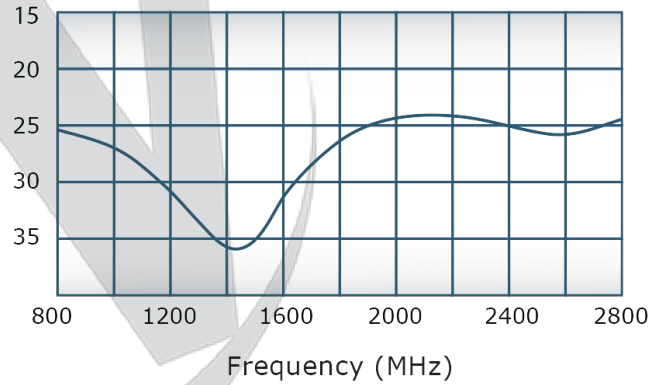

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.



REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL_5541F TYPE I CLASS 3 (YELLOW IRIDITE)**

		UNLESS OTHERWISE SPECIFIED		DWGN	DATE	17 Jon Barrett Rd	
		• INTERPRET DRAWING JAW MIL-STD-100		RH	7/5/2001	Patterson, NY 12563	
		• DIMENSIONING PER ASME Y14.5M-2009		CHK	DATE		
		• PARENTHESES FOR REF ONLY		ENGR	DATE		
		• DIMENSIONS ARE IN INCHES		MJ	7/5/2001		
		• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		MPGR	DATE		
		• TOLERANCES:		QA	DATE		
		• ANGLES ± 2°		RLSE	DATE		
		• 3 PL ± .005 [1.3]					
		• 2 PL ± .015 [3.8]					
		• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX					
		• CONCENTRICITY MACHINED DIA: .002 FIM					
		• MACHINE TOOL MISMATCH .003 MAX					
NEXT ASSY	USED ON	THIRD ANGLE PROJECTION		SCALE		SHEET 1 OF 1	
APPLICATION				1:1			

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com