



## PRODUCT DATA SHEET

C5339

1. **4-Port Dual Directional Coupler** employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

### Features:

High Power

Wide Bandwidths

Small Size

Flat Coupling

Custom Designs Available

### Electrical Specifications:

Frequency: 0.01 - 400 MHz  
Power: 200 W CW  
Coupling:  $40 \pm 1.0$  dB Max.  
Insertion Loss: 0.5 dB Max.  
Flatness:  $\pm 0.5$  dB Max.  
VSWR (ML): 1.25:1 Max.  
Directivity: 20 dB Min.

### Mechanical Specifications:

Type: Connectorized  
Material: Aluminum 6061-T6  
Surface Finish: Chem. Film Per MIL-DTL-5541F  
Type I Class 3 (Yellow Iridite)  
RoHS Compliant Available  
Operating Temperature: -55°C to +75°C  
Storage Temperature: -60°C to +85°C  
Humidity: 95% Non-Condensing  
Size: 5.2 x 2.28 x 1.69"

### Port Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C5339-10	N Female	N Female	N Female	N Female
C5339-12	N Female	N Female	SMA	SMA
C5339-13	N Female	N Female	BNC	BNC
C5339-610	N Female	N Male	N Female	N Female
C5339-714	N Male	N Female	N Female	N Female

**Werlatone®** Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



# WERLATONE

Model C5339

Connectorized Directional Couplers




## PRODUCT DATA SHEET


C5339

### Performance Data (Specifications subject to change without notice):


Coupling:

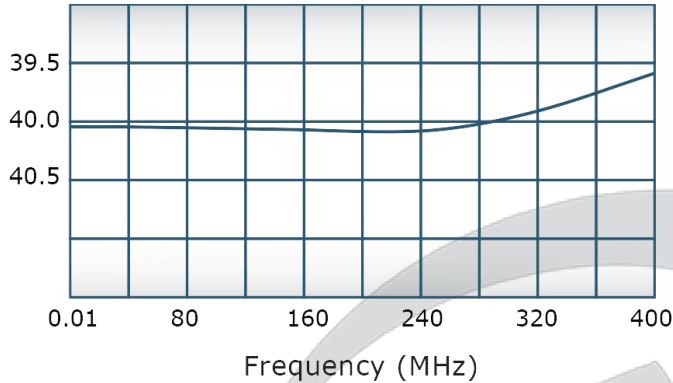


VSWR:

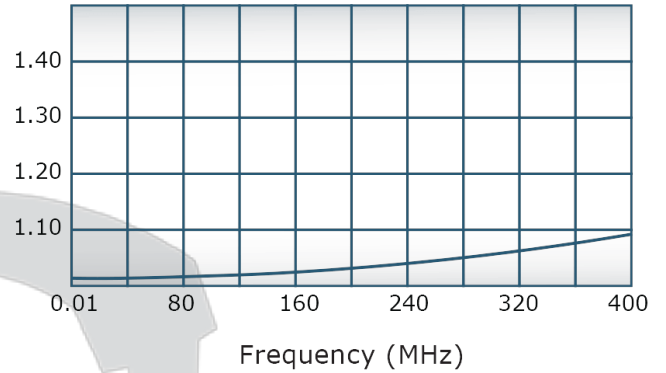

Insertion Loss:

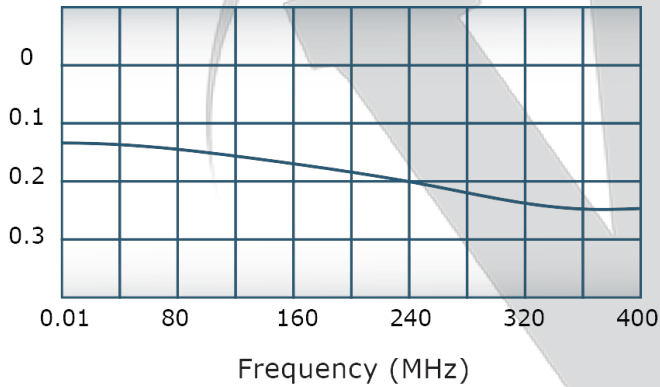

Directivity:

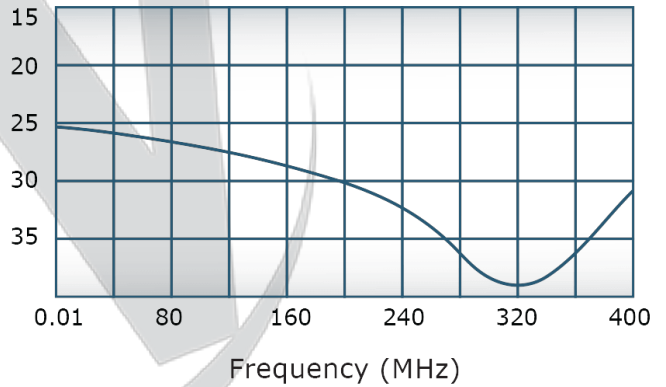


**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

**RESTRICTION ON USE, DUPLICATION OR  
DISCLOSURE OF PROPRIETARY INFORMATION**

This document contains proprietary information  
which is the sole property of Werlatone, Inc.

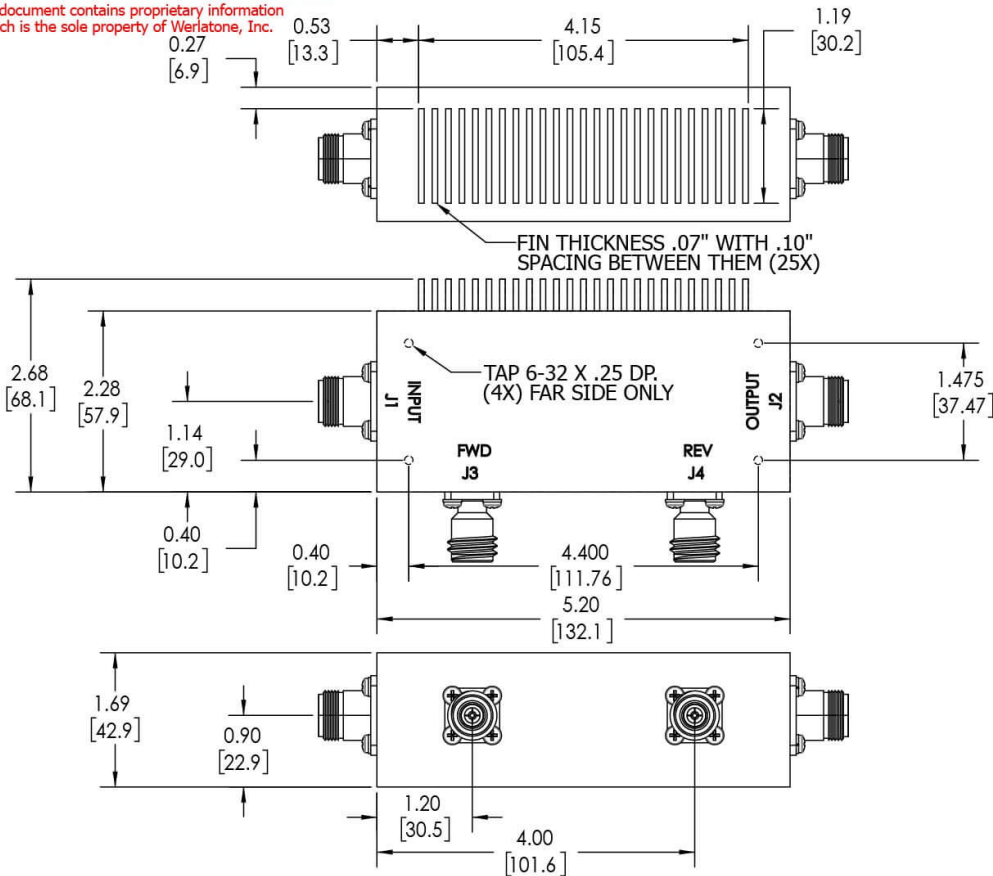




**REVISION HISTORY**

REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/28/18	RB

**NOTES: UNLESS OTHERWISE SPECIFIED**

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**  
J1, J2: N FEMALE  
J3, J4: N FEMALE

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE  SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563	
		INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		SD	2/11/2019	TITLE			
		DIMENSIONS PER ASME Y14.5M-2009		CHK	DATE				
		PARENTHESES FOR REF ONLY		CS	2/11/2019	OUTLINE		SIZE CAGE CODE DWG NO	
		DIMENSIONS ARE IN INCHES		ENGR	DATE				
		DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		CS	2/27/2002	B 10407-505		SCALE 1:1.5	
		TOLERANCES:		INFR	DATE				
		ANGLES ± 2°		QA	DATE	SHEET 1 OF 1		A	
		3 PL ± .005 [13]		RLSE	DATE				
		2 PL ± .015 [38]							
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX							
		CONCENTRICITY MACHINED DIA. .002 FIM							
		MACHINE TOOL MISMATCH .003 MAX							
NEXT ASSY USED ON		THIRD ANGLE PROJECTION 							
APPLICATION									

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.  
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com