
PRODUCT DATA SHEET
C10762

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 1000 - 6000 MHz
Power: 300 W CW
Coupling: 40 ± 1.0 dB Max.
Insertion Loss: 0.2 dB Max.
Flatness: ± 0.5 dB Max.
VSWR (ML): 1.30:1 Max. (1.35:1 Max. with 7/16 ML connectors)
Directivity: 15 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type II Class 3 (Clear Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 2.0 x 2.0 x 1.06"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C10762-10	N Female	N Female	N Female	N Female
C10762-12	N Female	N Female	SMA	SMA
C10762-14	N Male	N Male	N Female	N Female
C10762-20*	7/16 Female	7/16 Female	7/16 Female	7/16 Female
C10762-22*	7/16 Female	7/16 Female	SMA	SMA
C10762-612	N Female	N Male	SMA	SMA
C10762-714	N Male	N Female	N Female	N Female
C10762-727*	7/16 Male	7/16 Female	N Female	N Female


*Starred options are 3.0 x 3.0 x 1.36"



WERLATONE

Model C10762

Connectorized Directional Couplers

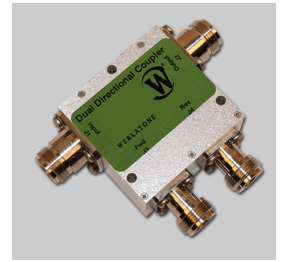


PRODUCT DATA SHEET


C10762

Performance Data (Specifications subject to change without notice):


Coupling:

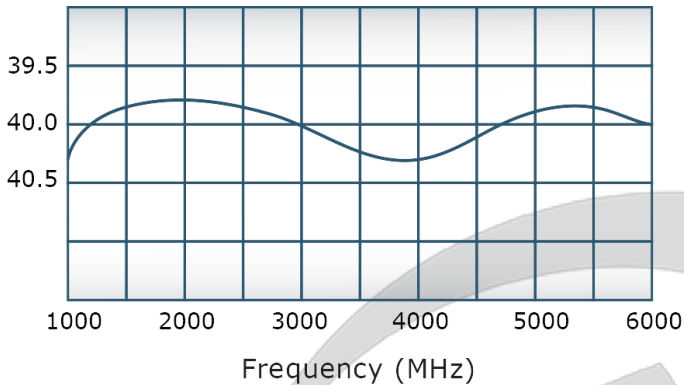


VSWR:

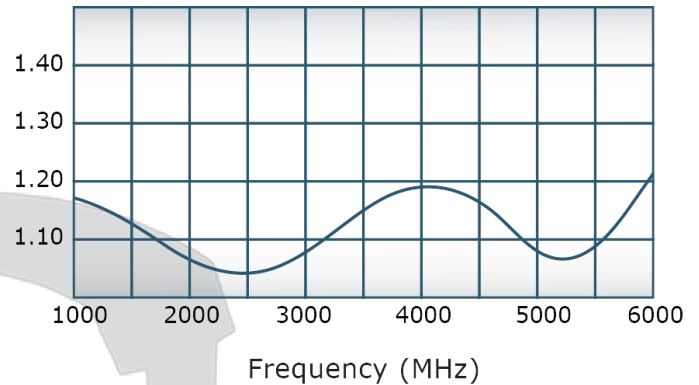

Insertion Loss:

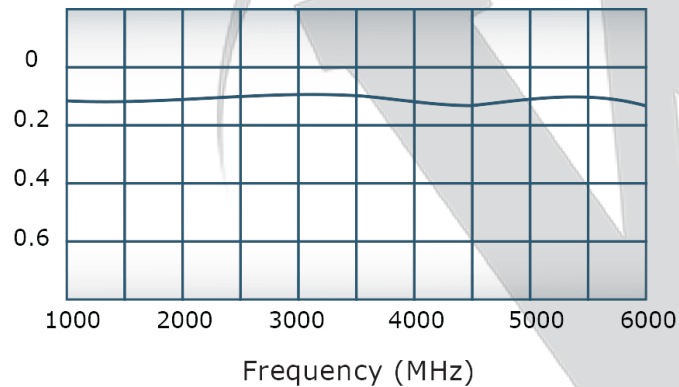

Directivity:



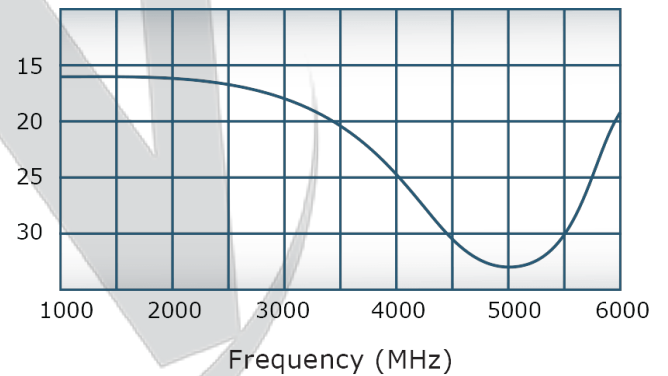


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
	PRE-RELEASE		

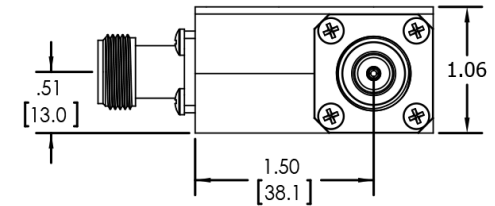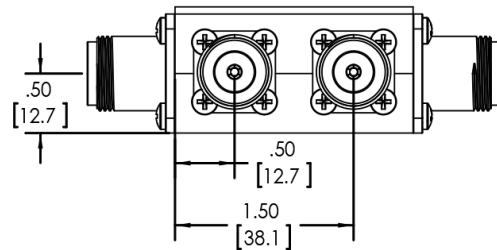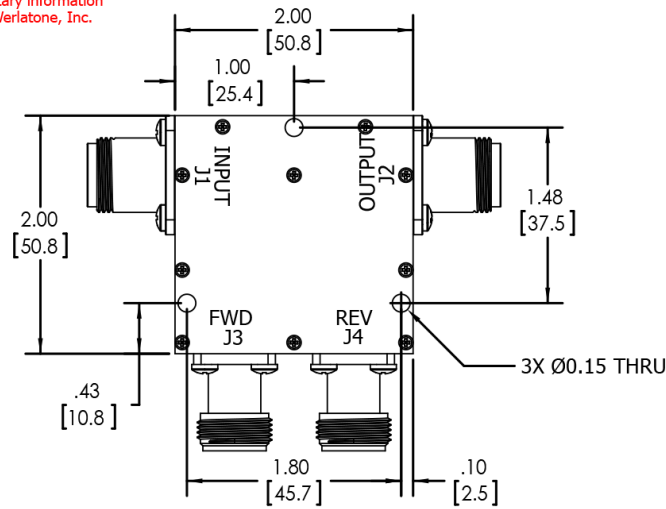

UNLESS OTHERWISE SPECIFIED INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100 DIMENSIONS ARE IN INCHES (mm) DIMENSIONS ARE IN INCHES (mm) DIMENSIONAL LIMITS APPLY BEFORE FINISHES TOLERANCES: ANGLES ± 2° 3 PL ± .005 (13) 2 PL ± .015 (4) REMOVE ALL BURRS AND SHARP EDGES R.01 MAX CONCENTRICITY MACHINED DIA. .002 FIM MACHINE TOOL MATCH .003 MAX		DATE	9/30/2014	OWN	SC
		DATE	9/30/2014	CHK	CS
		DATE	9/30/2014	ENGR	BW
		DATE	9/30/2014	APPR	QA
APPLICATION		DATE	9/30/2014	DATE	9/30/2014
NEXT ASSY		DATE	9/30/2014	DATE	9/30/2014
USED ON		DATE	9/30/2014	DATE	9/30/2014
THIRD ANGLE PROJECTION		DATE	9/30/2014	DATE	9/30/2014
TITLE		DATE	9/30/2014	DATE	9/30/2014
CAGE CODE		DATE	9/30/2014	DATE	9/30/2014
DWG NO		DATE	9/30/2014	DATE	9/30/2014
REV		DATE	9/30/2014	DATE	9/30/2014
SCALE		DATE	9/30/2014	DATE	9/30/2014
1:1		DATE	9/30/2014	DATE	9/30/2014
SHEET 1 OF 1		DATE	9/30/2014	DATE	9/30/2014

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com