



PRODUCT DATA SHEET

C10364

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 700 - 6000 MHz
Power: 500 W CW
Coupling: 50 ± 1.0 dB Max.
Insertion Loss: 0.2 dB Max.
Flatness: ± 1.0 dB Max.
VSWR (ML): 1.35:1 Max.
Directivity: 15 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 2.15 x 2.0 x 1.36"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C10364-20	7/16 Female	7/16 Female	N Female	N Female
C10364-22	7/16 Female	7/16 Female	SMA	SMA
C10364-727	7/16 Male	7/16 Female	N Female	N Female

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C10364

Connectorized Directional Couplers




PRODUCT DATA SHEET


C10364

Performance Data (Specifications subject to change without notice):


Coupling:

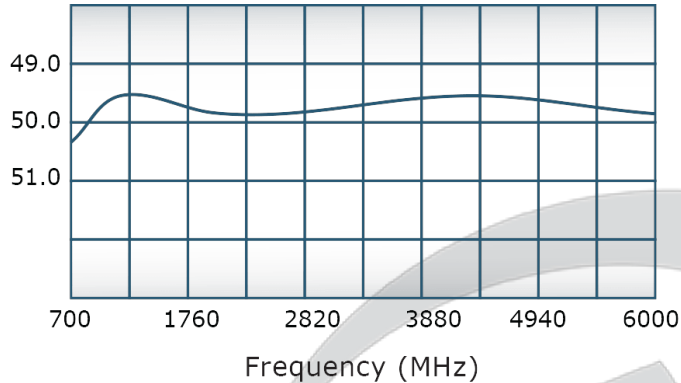


VSWR:

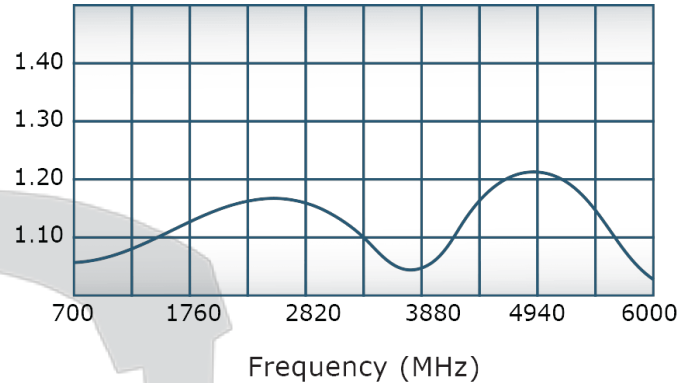

Insertion Loss:

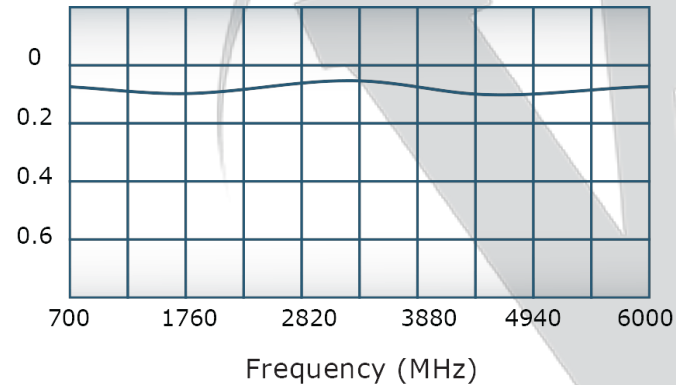


Directivity:

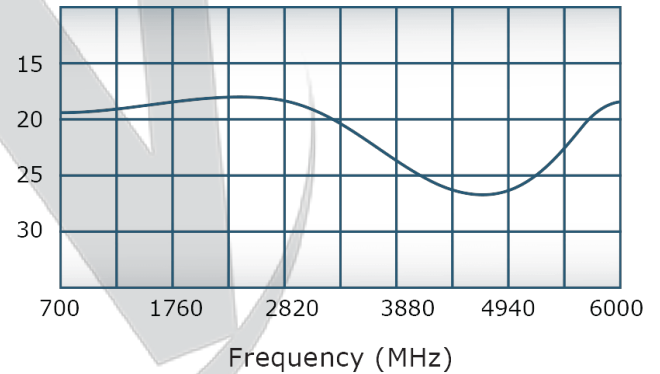

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

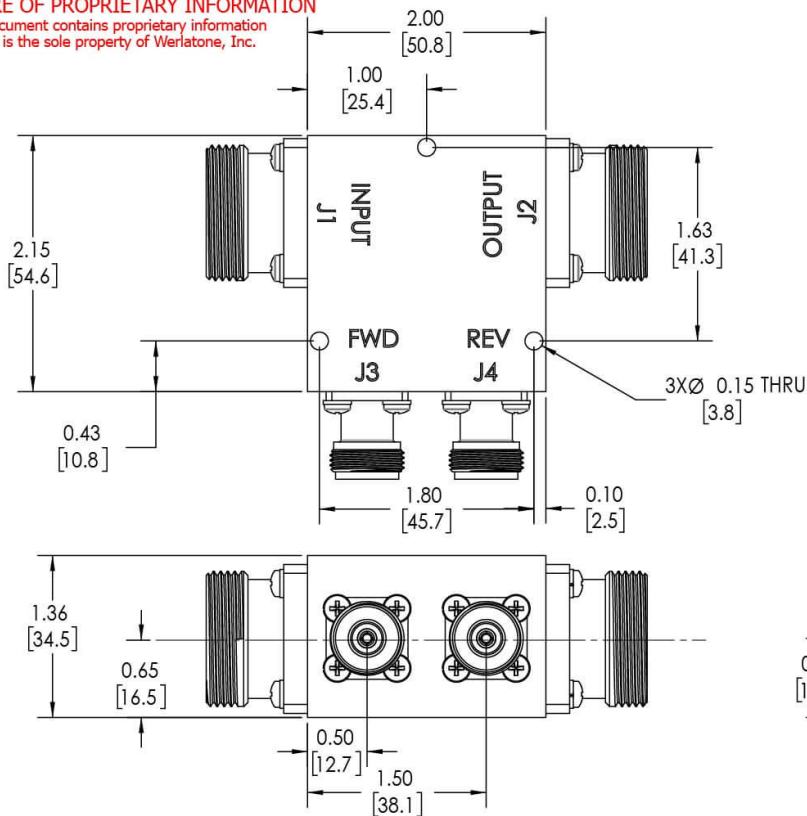


This document contains proprietary information
which is the sole property of Werlatone, Inc.



REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL-RELEASE	5/8/2015	BW
A	ECN 9696	3/25/19	RB

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)
3. CONNECTORS:
J1,J2: 7/16 FEMALE
J3,J4: N FEMALE

		UNLESS OTHERWISE SPECIFIED		DWN	DATE	 WERLATONE SINCE 1965 17 Jon Barrett Rd Patterson, NY 12563
		INTERPRET DRAWING INW MSL-STD-100		SD	3/25/2019	
		DIMENSIONING PER ASME Y14.5-2009		CHK	DATE	
		PARENTHEetical INFO FOR REF ONLY		CS	3/25/2019	
		DIMENSIONS ARE IN INCHES		ENGR	TITLE	
		DIMENSIONAL LIMITS APPLY BEFORE PROCESSES				 <h1>OUTLINE</h1>
		TOLERANCES				
		ANGLES ± .2°				
		3 PL ± .005 [13]				
		2 PL ± .015 [28]				
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX		MFGR	DATE	SIZE B CAGE CODE DWG NO <div>21316-500</div>
		CONCENTRICITY MACHINED DIA. .002 FIM		QA	DATE	
		MACHINE TOOL MACHINER .003 MAX				
				RLSE	DATE	
NEXT ASSY	USED ON	THIRD ANGLE PROJECTION 		SCALE		REV
APPLICATION				1:1		A
						SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com