

PRODUCT DATA SHEET

C7058

4-Port Bi-Directional Coupler: Similar to the 3-Port Uni-Directional Coupler, except that both ends of the coupled line serve as coupled ports. Convenient for simultaneously monitoring both forward and reverse power. The directivity of this coupler design is, however, dependent upon well matched 50 Ohm loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 200 - 2000 MHz
Power: 200 W CW
Coupling: 10 ± 1.0 dB Max.
Insertion Loss: 0.3 dB Max.
Flatness: ± 1.0 dB Max.
VSWR (ML): 1.25:1 Max.
Directivity: 20 dB Min.


Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 6.4 x 1.6 x 0.72"
Weight: 12 ounces

Port Configurations:

| Model | Input (J1) | Output (J2) | Fwd (J3) | Rev (J4) |
|-----------|------------|-------------|----------|----------|
| C7058-10 | N Female | N Female | N Female | N Female |
| C7058-12 | N Female | N Female | SMA | SMA |
| C7058-102 | SMA | SMA | SMA | SMA |

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




PRODUCT DATA SHEET


C7058

Performance Data (Specifications subject to change without notice):


Coupling:

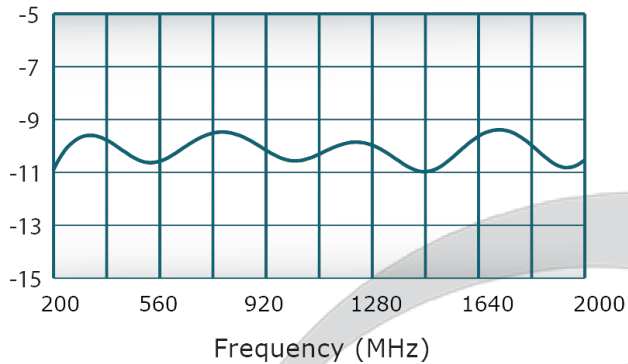


VSWR:

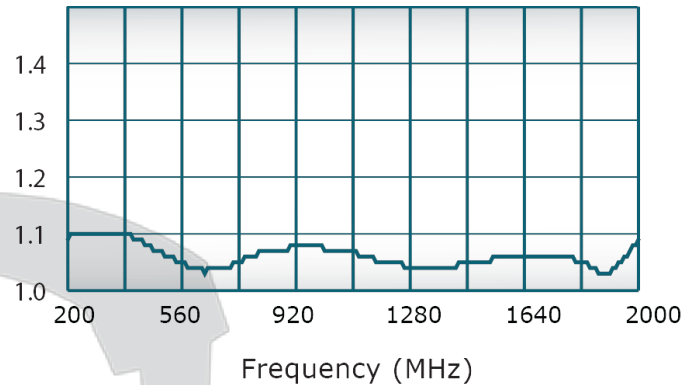

Insertion Loss:

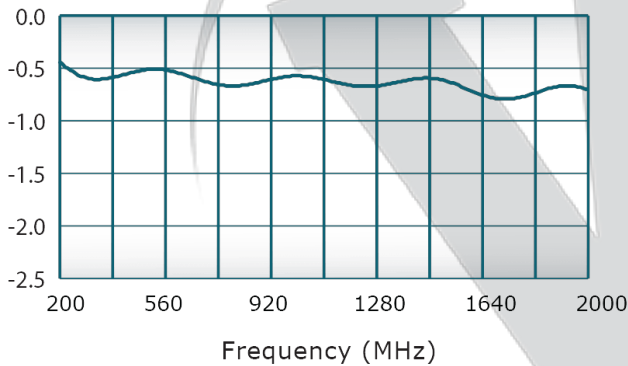



Directivity:

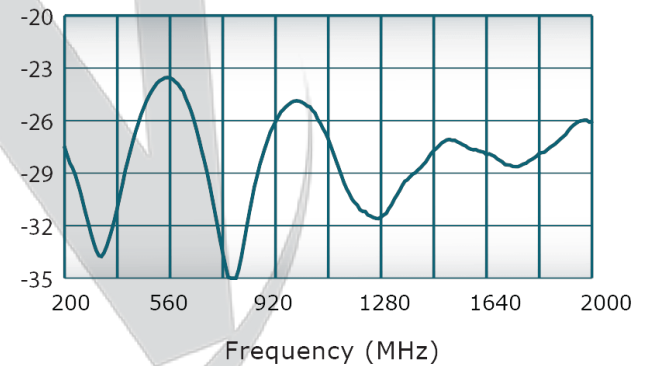


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

| DATE | SYM | REVISION RECORD | AUTH | DR | CK |
|------|-----|-----------------|------|----|----|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

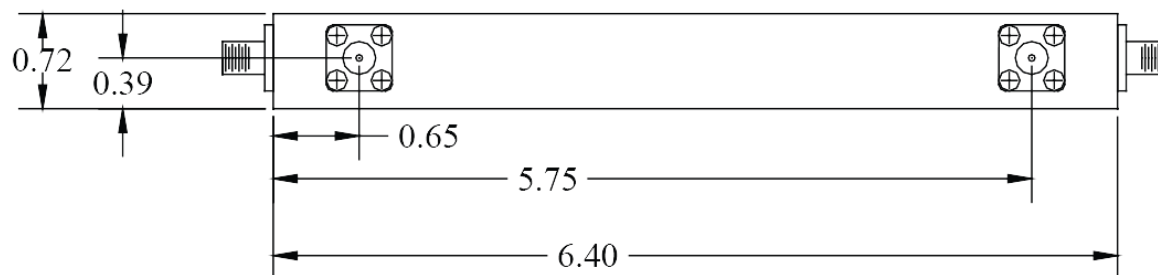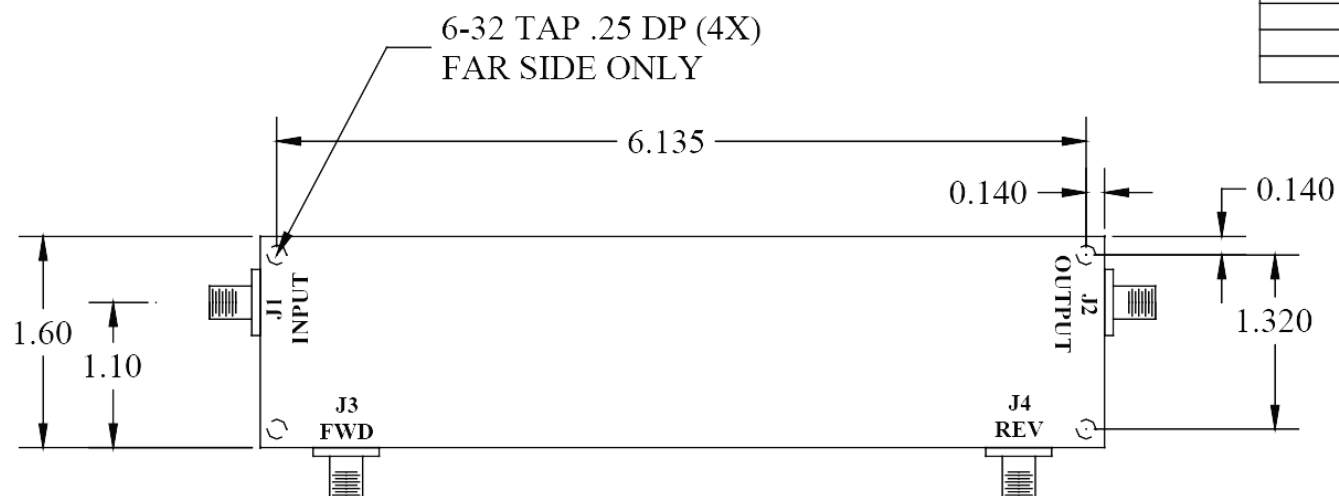

THIS DRAWING CONTAINS INFORMATION
PROPRIETARY TO WERLATONE INC. AND
MAY NOT BE USED OR COPIED WITHOUT
THE WRITTEN CONSENT OF WERLATONE INC.

| | | | |
|---|------------------------|------------------------------|--------------|
| TOLERANCE | WERLATONE INC. | | |
| XX +/- .015 | | SCALE | DRAWN BY: NH |
| XXX +/- .005 | | | APPVD BY: CS |
|  | TITLE : OUTLINE | | |
| | DATE 05/22/03 | DRAWING NO: 10906-501 | |

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com