



PRODUCT DATA SHEET

C5562

3-Port Uni-Directional Coupler: Consists of a main line and a coupled line. One end of the coupled line is internally terminated, while the other end serves as a coupled port. Ideal for sampling and monitoring power in one direction at a given time. It is necessary to physically reverse the orientation of the unit to change from a forward to a reverse power measurement.

Features:

High Power

Wide Bandwidths

Small Size

Flat Coupling

Custom Designs Available

Electrical Specifications:

Frequency:	1 - 500 MHz
Power:	30 W CW
Coupling:	20 ± 1.0 dB Max.
Insertion Loss:	1.2 dB Max.
Flatness:	± 1.0 dB Max.
VSWR (ML):	1.20:1 Max.
Directivity:	20 dB Min.

Mechanical Specifications:

Type:	Connectorized
Material:	Aluminum 6061-T6
Surface Finish:	Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature:	-55°C to +75°C
Storage Temperature:	-60°C to +85°C
Humidity:	95% Non-Condensing
Size:	5.2 x 2.675 x 1.69"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)
C5562-10	N Female	N Female	N Female
C5562-12	N Female	N Female	SMA
C5562-13	N Female	N Female	BNC
C5562-102	SMA	SMA	SMA
C5562-300	TNC	TNC	TNC

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




PRODUCT DATA SHEET


C5562

Performance Data (Specifications subject to change without notice):


Coupling:

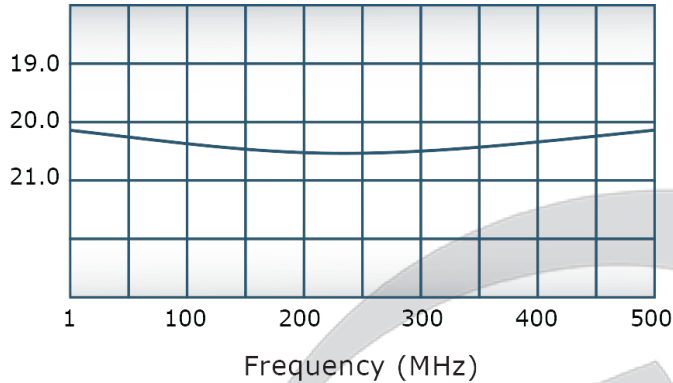


VSWR:

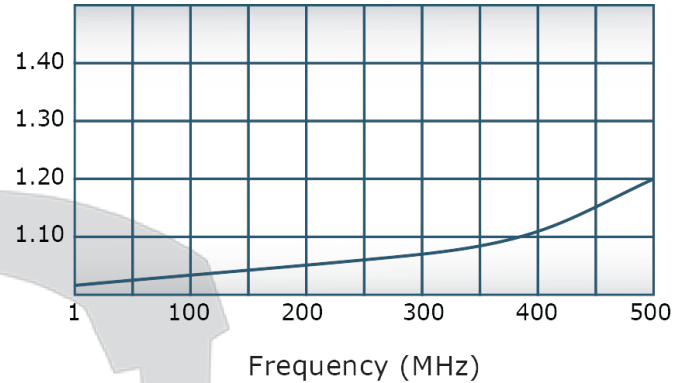

Insertion Loss:

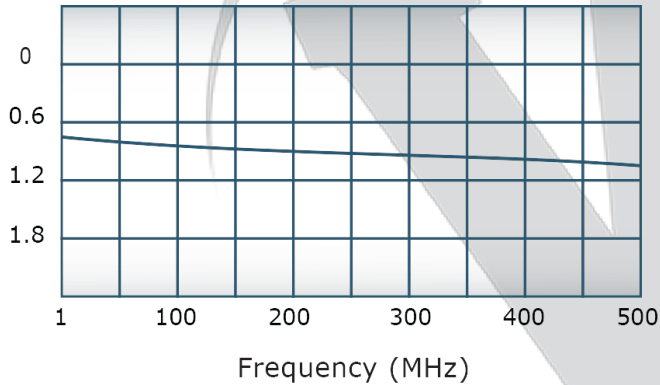

Directivity:

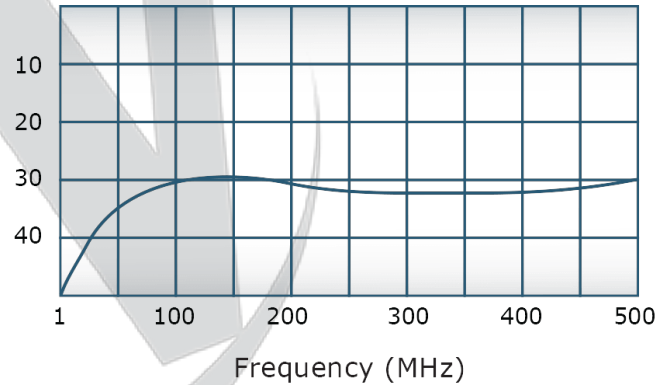

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com