

PRODUCT DATA SHEET

C7054

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 330 - 160 MHz
Power: 100 W CW
Coupling: 20 ± 1.0 dB Max.
Insertion Loss: 0.5 dB Max.
Flatness: ± 0.5 dB Max.
VSWR (ML): 1.30:1 Max.
Directivity: 20 dB Min.


Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 5.0 x 2.0 x 1.5"

Connector Configurations:

| Model | Input (J1) | Output (J2) | Fwd (J3) | Rev (J4) |
|-----------|------------|-------------|----------|----------|
| C7054-10 | N Female | N Female | N Female | N Female |
| C7054-12 | N Female | N Female | SMA | SMA |
| C7054-13 | N Female | N Female | BNC | BNC |
| C7054-102 | SMA | SMA | SMA | SMA |

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

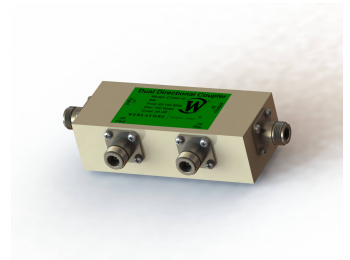


PRODUCT DATA SHEET


C7054

Performance Data (Specifications subject to change without notice):


Coupling:

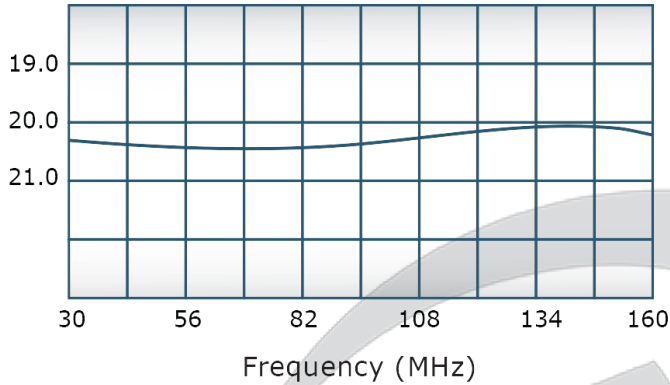


VSWR:

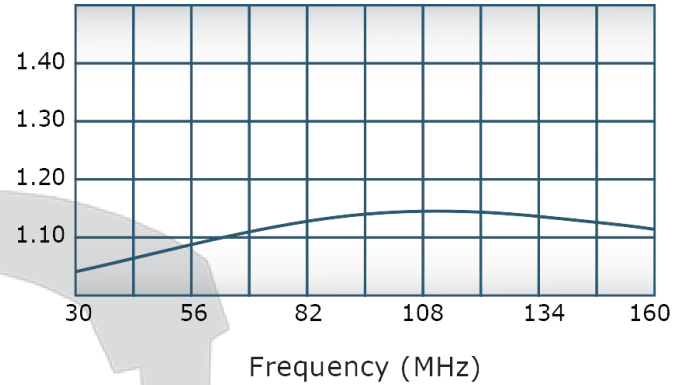

Insertion Loss:

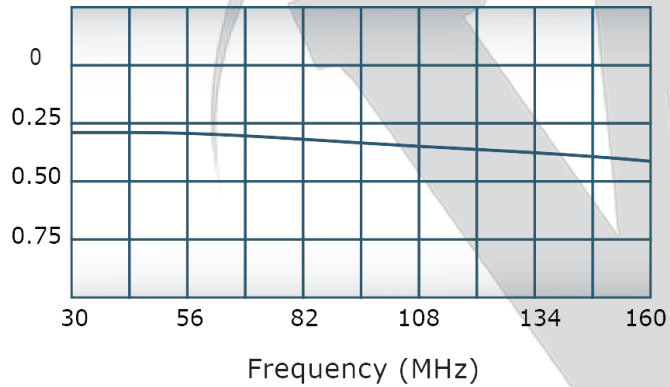



Directivity:

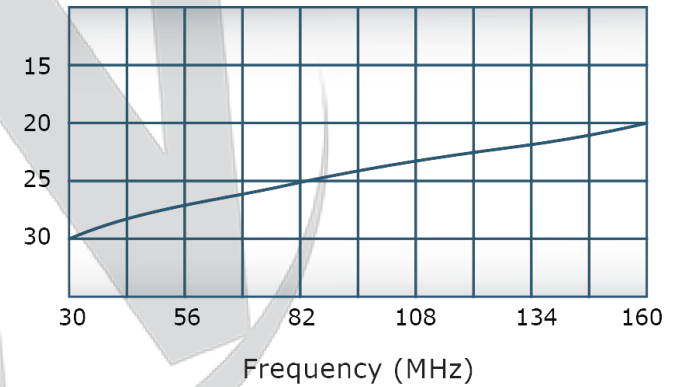



Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

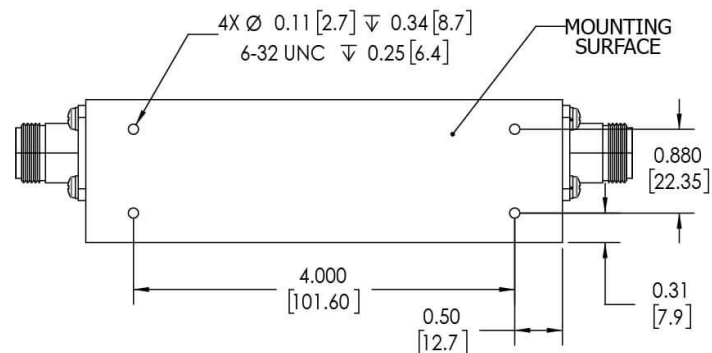This document contains proprietary information
which is the sole property of Werlatone, Inc.



| | | | | | | | | | | |
|-------------|---------|--|--|------|-----------|---|--|-----------|--------------|-----|
| | | UNLESS OTHERWISE SPECIFIED | | DWN | DATE |  WERLATONE[®] SINCE 1965 | 17 Jon Barrett Rd Patterson, NY 12563 | | | |
| | | INTERPRET DRAWING IAW MIL-STD-100 | | SD | 6/12/2019 | | | | | |
| | | DIMENSIONS PER ASME Y14.5-2009 | | CHK | DATE | | | | | |
| | | PARENTAL INFO FOR REF ONLY | | CS | 6/12/2019 | | TITLE | | | |
| | | DIMENSIONS ARE IN INCHES | | ENGR | DATE | | OUTLINE | | | |
| | | DIMENSIONAL LIMITS APPLY BEFORE PROCESSES | | MFR | DATE | | | | | |
| | | TOLERANCES: | | QA | DATE | SIZE | | CAGE CODE | DWG NO. | REV |
| | | ANGLES ± ° | | ELSE | DATE | B | | 10888-500 | | A |
| NEXT ASSY | USED ON | | | | | SCALE | 1:25 | | SHEET 1 OF 1 | |
| APPLICATION | | THIRD ANGLE PROJECTION  | | | | | | | | |

Werlatone, Inc. All Rights Reserved

C7054 Rev.-