



PRODUCT DATA SHEET

C7646

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 1 - 500 MHz
Power: 30 W CW
Coupling: 20 ± 1.0 dB Max.
Insertion Loss: 3.0 dB Max.
Flatness: ± 1.0 dB Max.
VSWR (ML): 1.30:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 5.2 x 2.67 x 1.69"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C7646-10	N Female	N Female	N Female	N Female
C7646-12	N Female	N Female	SMA	SMA
C7646-13	N Female	N Female	BNC	BNC
C7646-102	SMA	SMA	SMA	SMA
C7646-200	BNC	BNC	BNC	BNC

* Insertion Loss includes 0.08 dB Coupling Loss.

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition.



WERLATONE

Model C7646

Connectorized Directional Couplers




PRODUCT DATA SHEET


C7646

Performance Data (Specifications subject to change without notice):


Coupling:

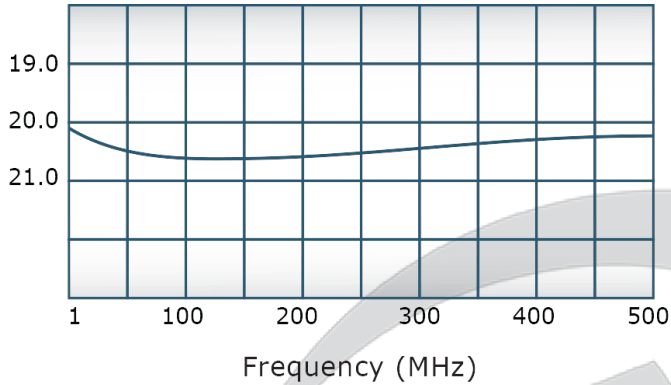


VSWR:

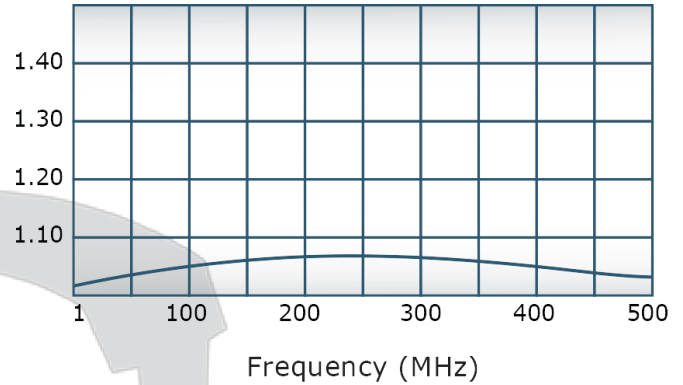

Insertion Loss:

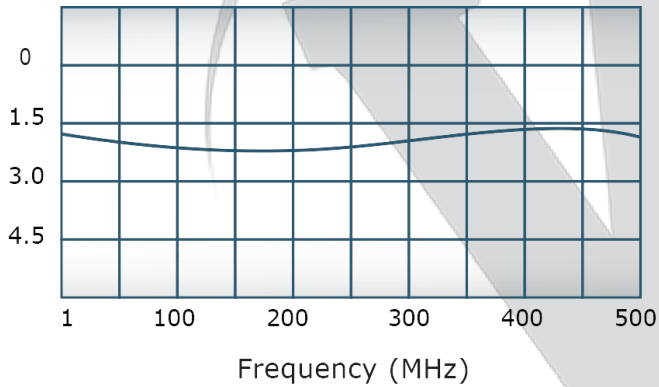

Directivity:

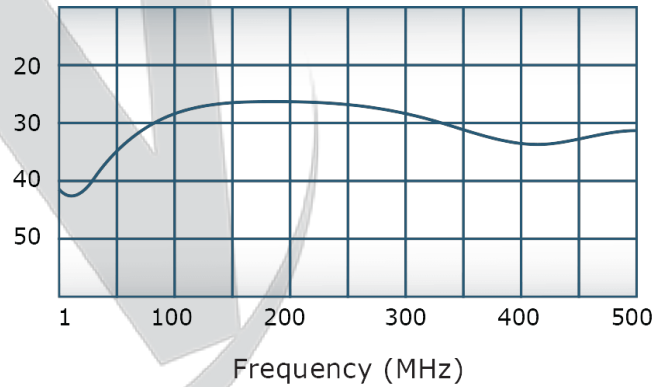

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION


This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/28/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1-J4: SMA FEMALE

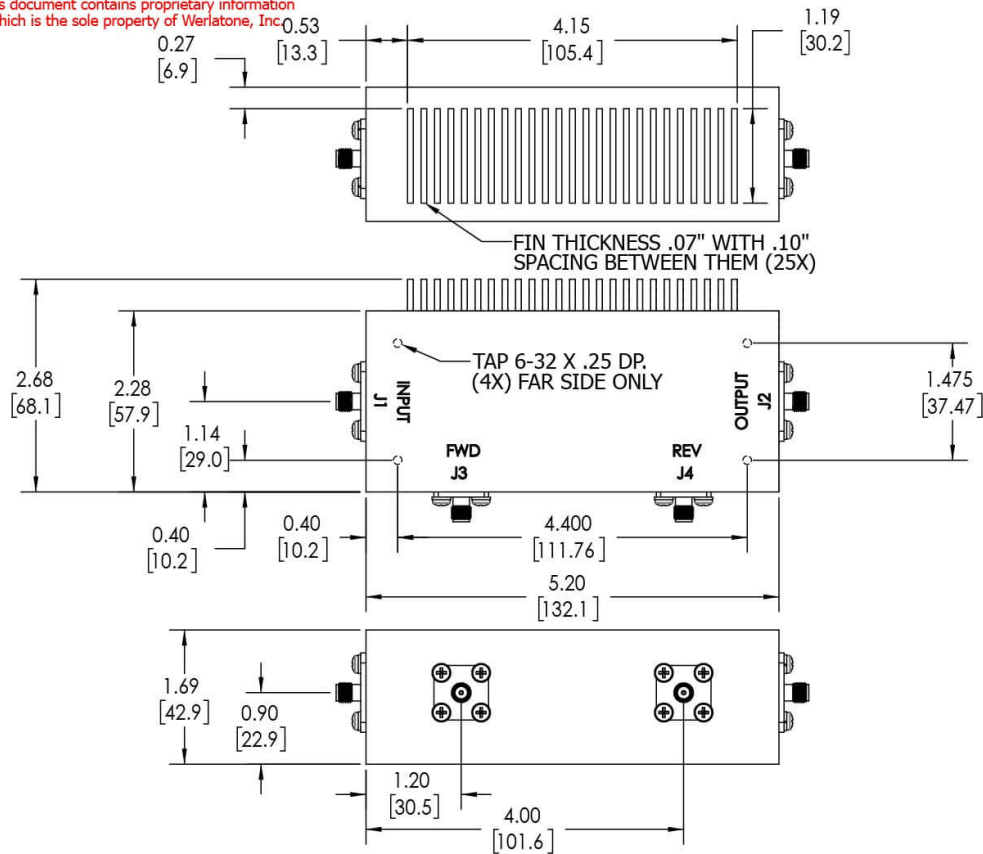

UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563		
INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		SD	2/11/2019				
DIMENSIONS PER ASME Y14.5M-2009		CHK	DATE				
PARENTHESES FOR REF ONLY		CS	2/11/2019				
DIMENSIONS ARE IN INCHES		ENGR	TITLE				
DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		BW	9/13/1996	OUTLINE			
TOLERANCES:		INFR	DATE				
ANGLES ± 2°		QA	DATE				
3 PL ± .005 [13]		RLSE	DATE				
2 PL ± .015 [38]							
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX		SIZE			CAGE CODE	DWG NO	REV
CONCENTRICITY MACHINED DIA. .002 FIM		SCALE			10407-501		A
MACHINE TOOL MISMATCH .003 MAX		B			1:1.5		
THIRD ANGLE PROJECTION							SHEET 1 OF 1
NEXT ASSY	USED ON						
APPLICATION							

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com