
PRODUCT DATA SHEET
C11078

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 1 - 1000 MHz
Power: 1000 W CW
Coupling: 43 ± 1.0 dB Max.
Insertion Loss: 0.45 dB Max.
Flatness: ± 0.5 dB Max.
VSWR (ML): 1.30:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 6.7 x 2.27 x 1.69"

Connector Configurations:


Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C11078-41	SC Female	SC Female	N Female	N Female
C11078-43	SC Female	SC Female	SMA	SMA

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C11078

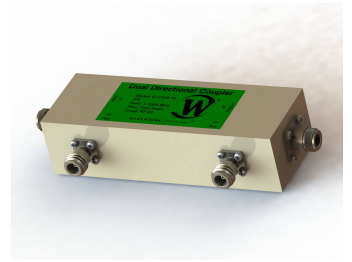


PRODUCT DATA SHEET


C11078

Performance Data (Specifications subject to change without notice):


Coupling:

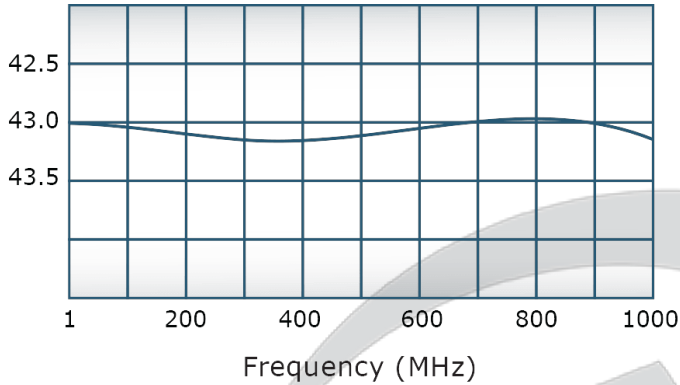


VSWR:

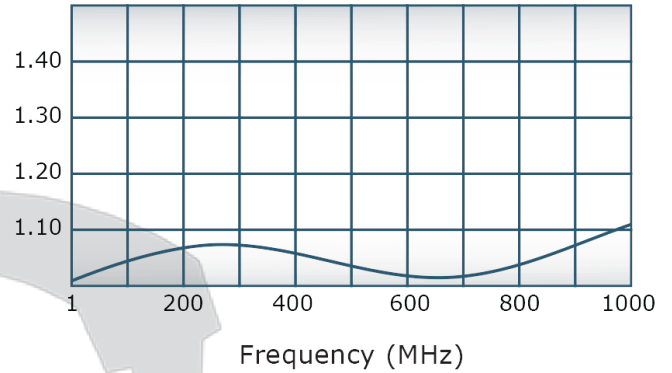

Insertion Loss:

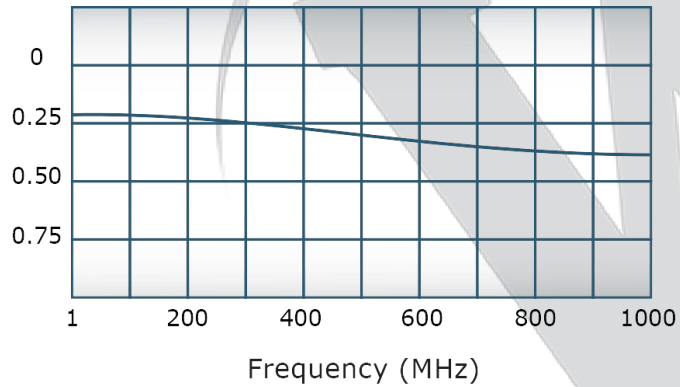

Directivity:


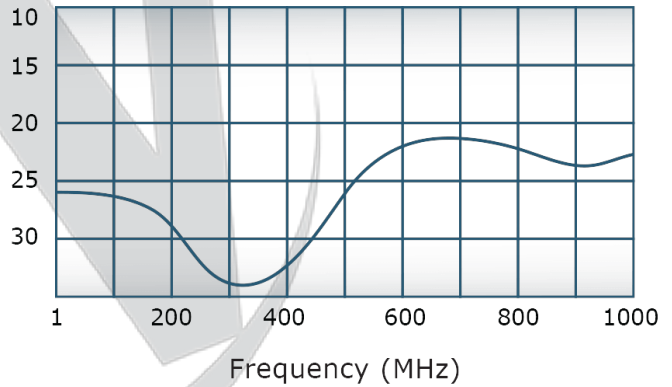


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	5/14/2019	RB

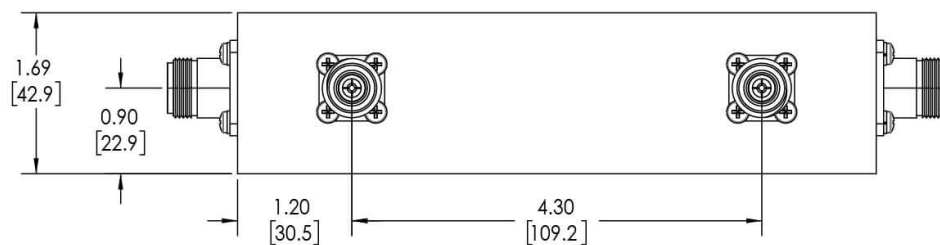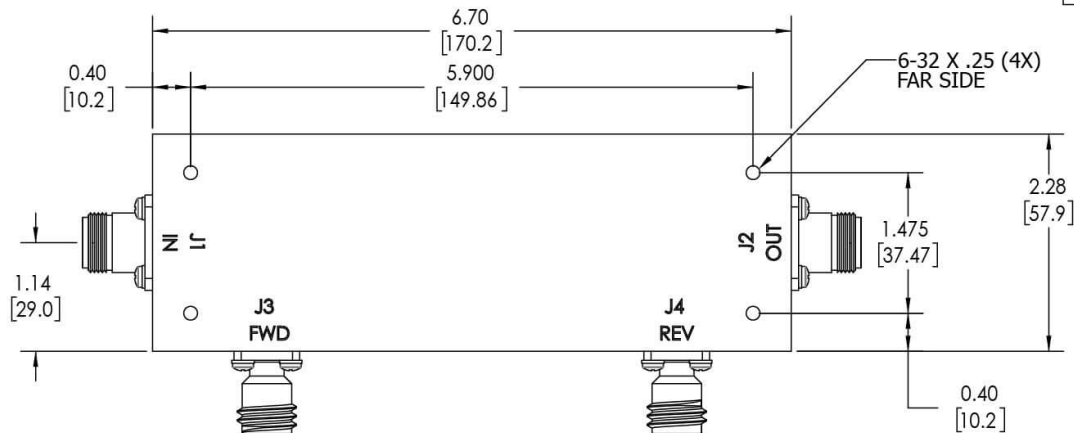

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1-J4: N FEMALE

		UNLESS OTHERWISE SPECIFIED		OWN	DATE			17 Jon Barrett Rd Patterson, NY 12563	
		INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		SD	5/14/2019	 WERLATONE SINCE 1965			
		DIMENSIONS FOR ASSEMBLY SHALL BE IN INCHES		CHK	DATE				
		PARENTHESES ARE USED FOR REFERENCE ONLY		CS	5/14/2019	TITLE			
		DIMENSIONS ARE IN INCHES		ENGR	DATE	OUTLINE			
		DIMENSIONAL LIMITS APPLY BEFORE FINISHES		INFR	DATE	SIZE: B CAGE CODE: 10641-500 DWG NO: A		REV	
		TOLERANCES:		QA	DATE	SCALE: 1:1.25		SHEET 1 OF 1	
		ANGLES: ± 2° 3 PL ± .005 [13] 2 PL ± .015 [38]		RLSE	DATE				
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX CONCENTRICITY MACHINED DIA: .002 FIM MACHINE TOOL MISMATCH .003 MAX		THIRD ANGLE PROJECTION					
NEXT ASSY USED ON									
APPLICATION									

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com