



PRODUCT DATA SHEET

QH10089

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 800 - 2800 MHz
 Power: 200 W CW
 Insertion Loss: 0.35 dB Max.
 VSWR: 1.30:1 Max.
 Phase Balance: $\pm 5^\circ$ dB Max.
 Amplitude Balance: ± 0.4 dB Max.
 Isolation: 20 dB Min.

Mechanical Specifications:

Type: Surface Mount
 Plating Options: QH10089-Ag: Immersion Silver (RoHS)
 Size: 1.25 x 0.55 x 0.081"
 Weight: 2.5 grams

Port Configurations:

J1	J2	J3	J4
Input	-3 dB, 0°	-3 dB, -90°	Isolated
-3 dB, 0°	Input	Isolated	-3 dB, -90°
-3 dB, -90°	Isolated	Input	-3 dB, 0°
Isolated	-3 dB, -90°	-3 dB, 0°	Input

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



WERLATONE

Model QH10089




PRODUCT DATA SHEET


QH10089

Performance Data (Specifications subject to change without notice):


Coupling:

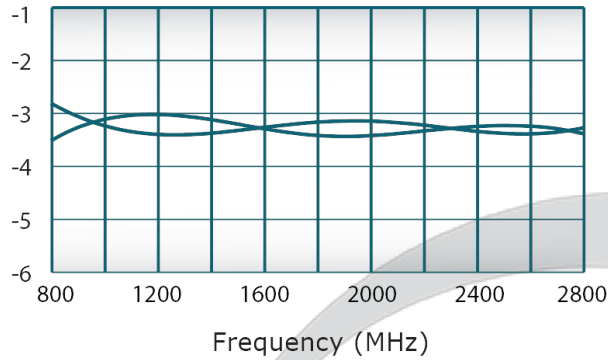


VSWR:

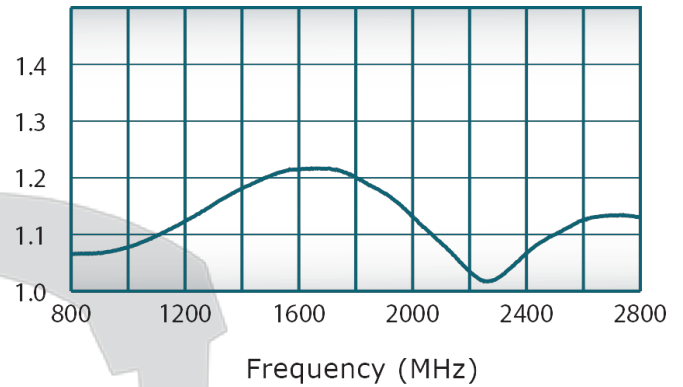

Isolation:

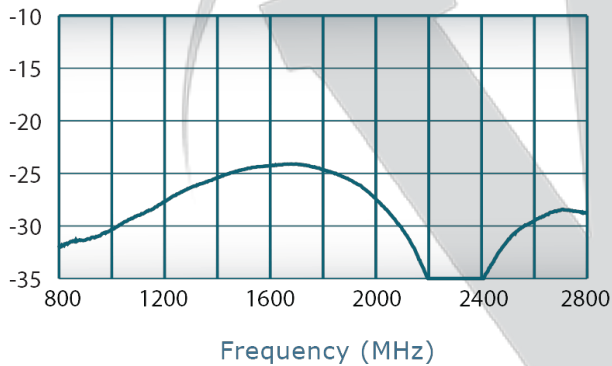

Phase Balance:


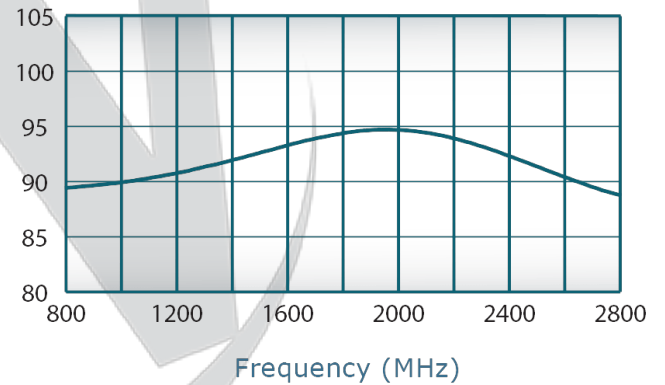


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information
which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	DESCRIPTION	DATE	APPROVED
-	INITIAL-RELEASE	11/24/14	BW

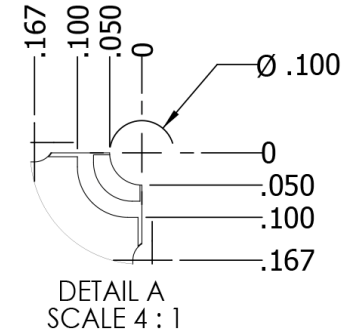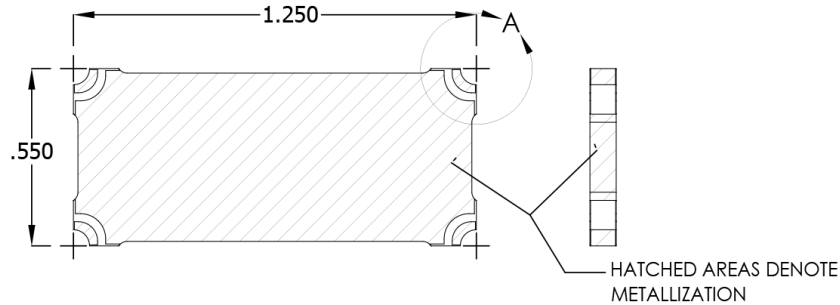

Part Marking
(Top Surface)



SCALE 1 : 1

		UNLESS OTHERWISE SPECIFIED • INTERPRET DRAWING IAW MIL-STD-100 • DIMENSIONING PER ASME Y14.5M-2009 • PARENTHEetical INFO FOR REF ONLY • DIMENSIONS ARE IN INCHES • TOLERANCES: ANGLES ± 2° 3 PL ± .010 2 PL ± .015	DWN	DATE	W WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563		
			GP	11/24/2014				
			CHK	DATE				
			BW	11/24/2014				
			ENGR	DATE				
			MFGR	DATE				
			QA	DATE				
NEXT ASSY	USED ON		RLSE	DATE	SIZE	CAGE CODE	DWG NO	REV
APPLICATION		THIRD ANGLE PROJECTION 			A	28812	21207-500	-
					SCALE	2:1	SHEET	1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com