

PRODUCT DATA SHEET

QH8193

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 2000 - 6000 MHz
 Power: 100 W CW
 Insertion Loss: 0.25 dB Max.
 VSWR: 1.30:1 Max.
 Phase Balance: $\pm 5^\circ$ dB Max.
 Amplitude Balance:
 2.0 GHz: ± 0.9 dB Max.
 4.0 GHz: ± 0.75 dB Max.
 6.0 GHz: ± 0.75 dB Max.
 Isolation: 20 dB Min.

Mechanical Specifications:

Type: Surface Mount
 Plating Options:
 QH8193-Sn: Immersion Tin (RoHS)
 QH8193-Ag: Immersion Silver (RoHS)
 QH8193-Au: ENIG (RoHS)
 QH8193-Pb: Electrodeposited Tin/Lead
 Size: 0.85 x 0.33 x 0.14"
 Weight: 1.5 grams

Port Configurations:


J1	J2	J3	J4
Input	-3 dB, 0°	-3 dB, -90°	Isolated
-3 dB, 0°	Input	Isolated	-3 dB, -90°
-3 dB, -90°	Isolated	Input	-3 dB, 0°
Isolated	-3 dB, -90°	-3 dB, 0°	Input

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.



WERLATONE

Model QH8193




PRODUCT DATA SHEET


QH8193

Performance Data (Specifications subject to change without notice):


Coupling:

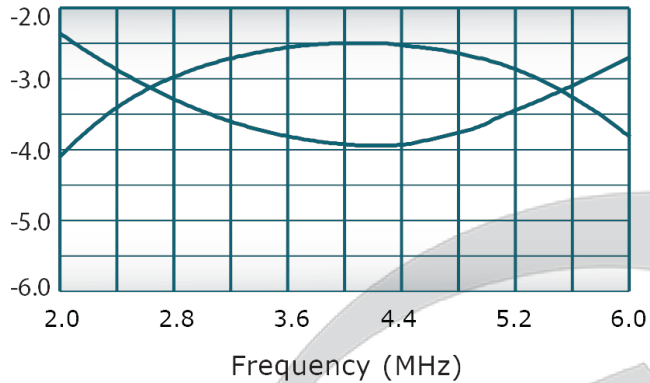


VSWR:

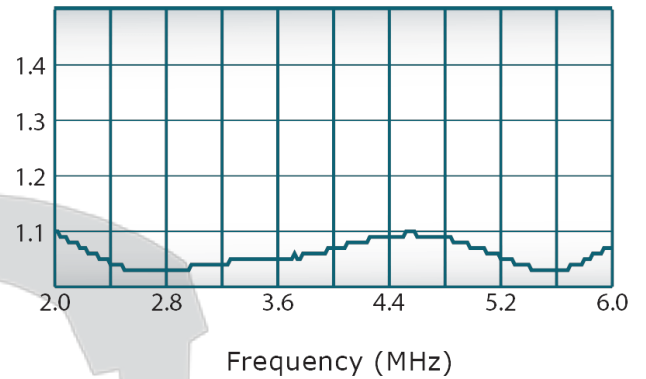

Isolation:

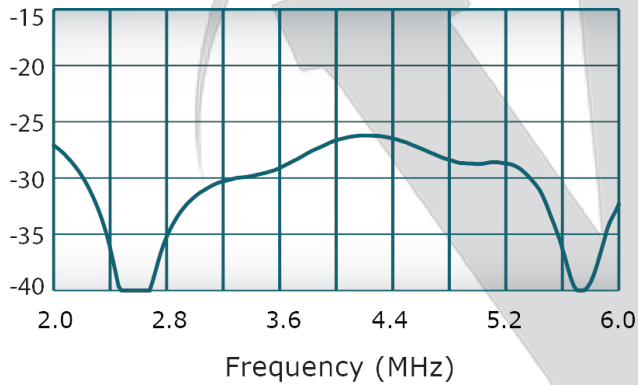

Phase Balance:

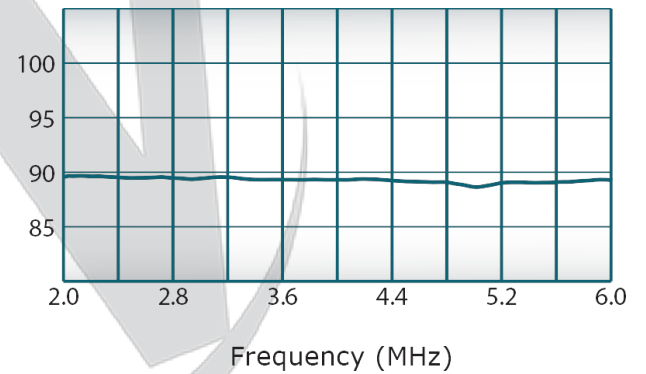


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

DATE	SYM	REVISION RECORD	AUTH	DR	CK
7/23/2008	A	ECN 4567	GP	GP	NH
8/26/2008	B	ECN 4595	GP	GP	NH
5/7/2009	C	ECN 4882	GP	GP	NH
11/3/2009	D	ECN 5000	CS	CS	TC
6/23/2015	E	ECN 8845	GP	GP	BW

Top View

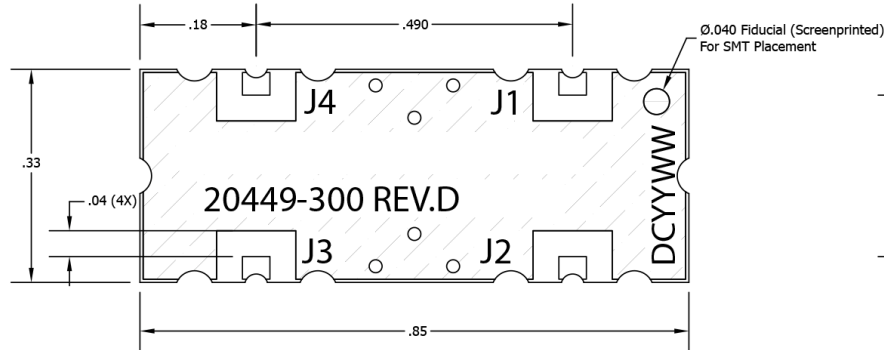

Bottom View

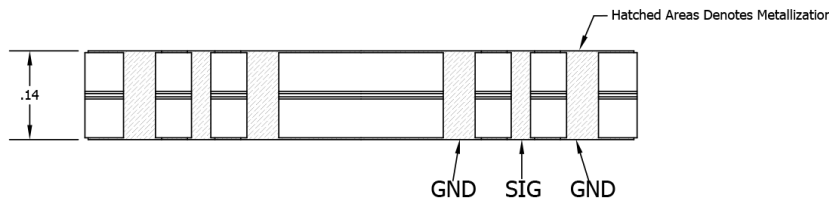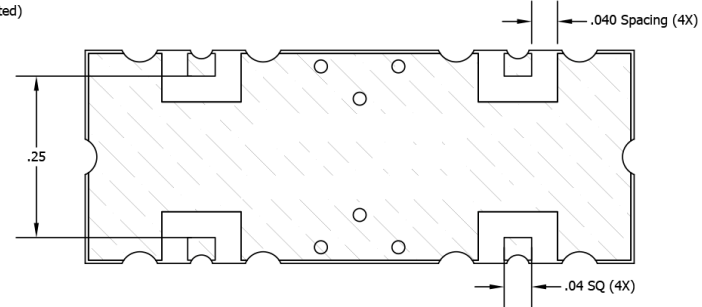

UNLESS OTHERWISE SPECIFIED		DWN	GP	DATE	6/12/08	 WERLATONE SINCE 1965		2095 Route 22 Brewster, NY 10509	
● INTERPRET DRAWING IAW MIL-STD-100		CHK	NH	DATE	5/7/09				
● DIMENSIONING PER ASME Y14.5M-2009		ENGR	BW	DATE	5/7/09	TITLE		USED ON	
● PARANTHETICAL INFO FOR REF ONLY		QA		DATE		SIZE		CAGE CODE	
● DIMENSIONS ARE IN INCHES		RLSE		DATE		A		28812	
● TOLERANCES: ANGLE ± 2°						DWG NO		REV	
3 PL DECIMALS ± .005						20449-500		E	
2 PL DECIMALS ± .015						SCALE		4:1	
THIRD ANGLE PROJECTION								SHEET 1 OF 1	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com